

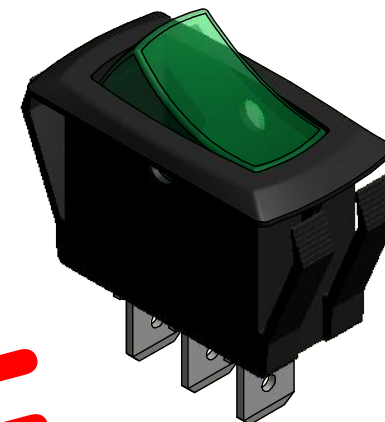


SUGGESTED PANEL CUTOUT

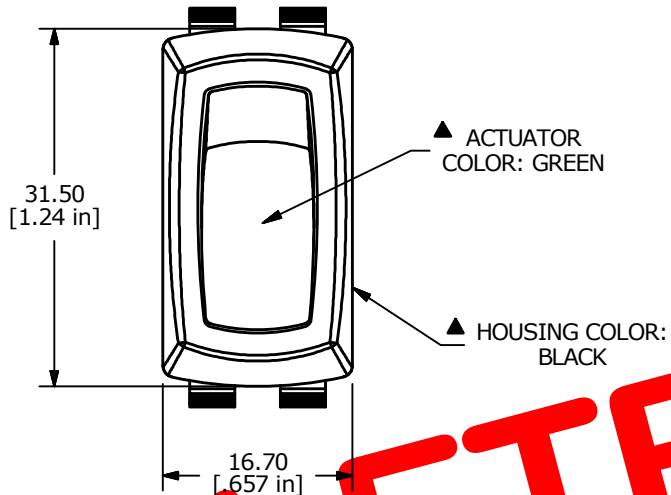

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	2-1, 2-3




CIRCUIT: SPST  
OFF - ON

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
3. TERM. NOS. FOR REF. ONLY
- ▲ 4. RATING: 20A 125VAC [cURus]  
16A 250VAC [cURus]  
3/4HP 250VAC [cURus]  
16(4)A 250V~ 1E4 T85/55 [ENEC10, VDE]  
10(2)A 250V~ 5E4 T85/55 [ENEC10, VDE]  
20(8)A 250V~ 1E4 T125/55 [ENEC10, VDE]
5. MATERIAL: CONTACT SURFACE: SILVER PLATED COPPER  
TERMINAL: BRASS ALLOY w/SILVER PLATE
6. ELECTRICAL LIFE: 10,000 CYCLES MIN.
7. CONTACT RESISTANCE: 20 Milli-OHMS MAX.
8. OPERATING TEMP: -20°C TO 65°C [cURus]  
-20°C TO 105°C [cURus]  
-20°C TO 125°C [ENEC10, VDE]
9. DIELECTRIC STRENGTH: >1,000V AC 1MIN
- ▲ 10. LAMP VOLTAGE: 250V
11. ▲ DENOTES CRITICAL PARAMETER.
12. 2011/65/EU (ROHS) COMPLIANT

OBSOLETE  
 January 2018  
 PCR 23169

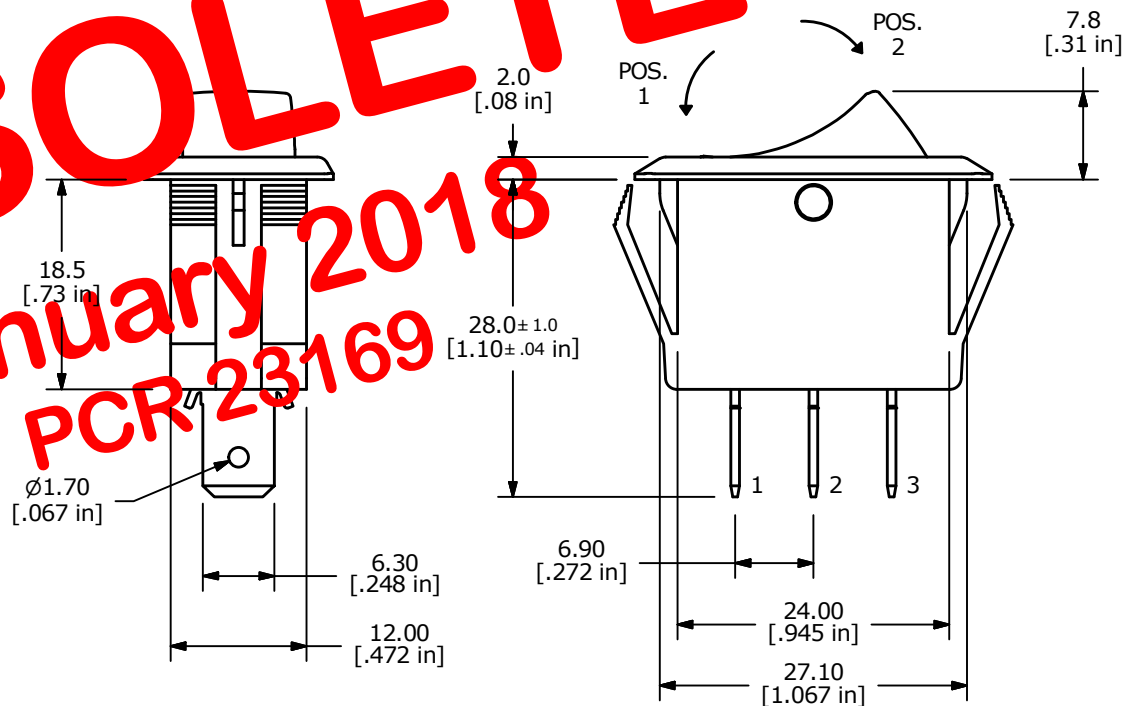

A	22586	NEW RELEASE	11/15/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE	RSC241D1000-137			
-------	-----------------	--	--	--

SCALE	DATE	DR	DWG	REV
3:2	11/15/2016	MW	14-RSC241D1000137	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED