


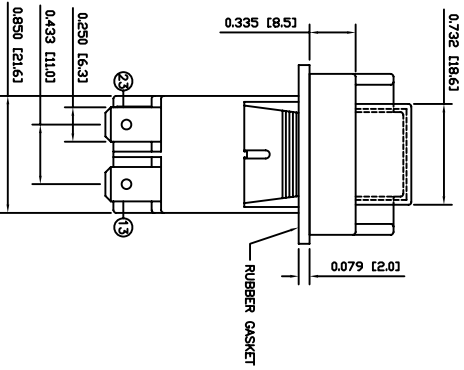


POSITION 2 POSITION 1

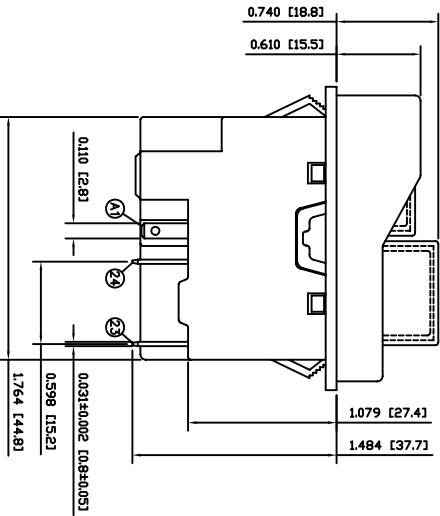

SCHEMATIC

SPECIFICATIONS

FUNCTION:
2PT OFF-ON
Auto OFF Below Calibration Voltage
Remote Trip

RATINGS:
ANSI/UL 508 and CAN/CSA C22.2 No.14 (E195908):
16A 120VAC [cURus]
1/2HP 120VAC (9.6A FLA, 58.6A LRA) [cURus]

CALIBRATION VOLTAGE:
Use: 120±50V
Release: 55-75V

ELECTRICAL LIFE:
6,000 Cycles [cURus]

INGRESS PROTECTION:
IP55

APPROVALS:



COLORS AND MARKINGS

BEZEL:
Black

ACTUATOR:
ON: Green
OFF: Red

MARKING:
I/O Vertical (1)

MARKING COLOR:
White

MATERIALS

UPPER BODY:
Polyamide 6/6 (PA66)

LOWER BODY:
Polyamide 6/6 (PA66+G10)

BEZEL:
Polyamide 6/6 (PA66+G10)

ACTUATORS:
Polyamide 6/6 (PA66)


MOUNTING EARS:
Polyamide 6/6 (PA66)

COVER:
Polyvinyl Chloride (PVC)

CONTACTS:
Silver Alloy Clad Copper (AgSnO/Cu)

TERMINALS:
Brass

GASKET:
Rubber



KJD17-22213-112

DIMENSIONS

INCHES [MILLIMETERS]	
GENERAL TOLERANCES	±0.020 [±0.5] / ±.1
PROJECTION	DRAWING NOT TO SCALE

REV.	DATE	BY	DESCRIPTION
A	05/08/12	PCB	Removed 12A rating
B	2009081	PCB	INITIAL RELEASE

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

REV.	DATE	BY	DESCRIPTION
A	09/08/07	CB	REV.
A	09/08/07	CB	REV.
A	09/08/07	CB	REV.

REV.	DATE	BY	DESCRIPTION
1	09/08/07	CB	REV.
2	09/08/07	CB	REV.
3	09/08/07	CB	REV.
4	05/08/12	PCB	Removed 12A rating
5	2009081	PCB	INITIAL RELEASE
6	05/08/12	PCB	Removed 12A rating
7	05/08/12	PCB	Removed 12A rating
8	05/08/12	PCB	Removed 12A rating