SHEET 1 OF 1

▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

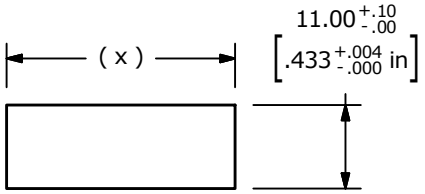

PANEL CUTOUT

PANEL THICKNESS	(x)
0.75 - 1.25	30.0
1.25 - 2.00	30.4
2.00 - 3.00	30.7

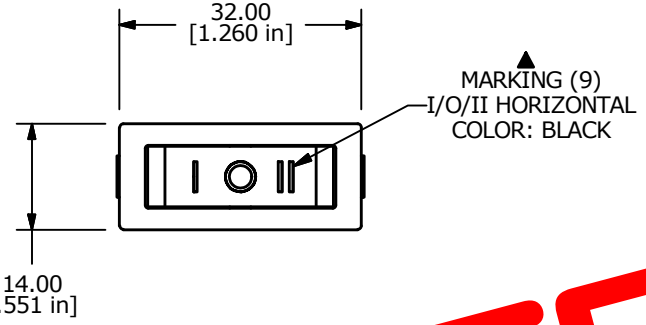





CURCUIT: SPDT

OBSOLETE
November 2017
PCR 23095

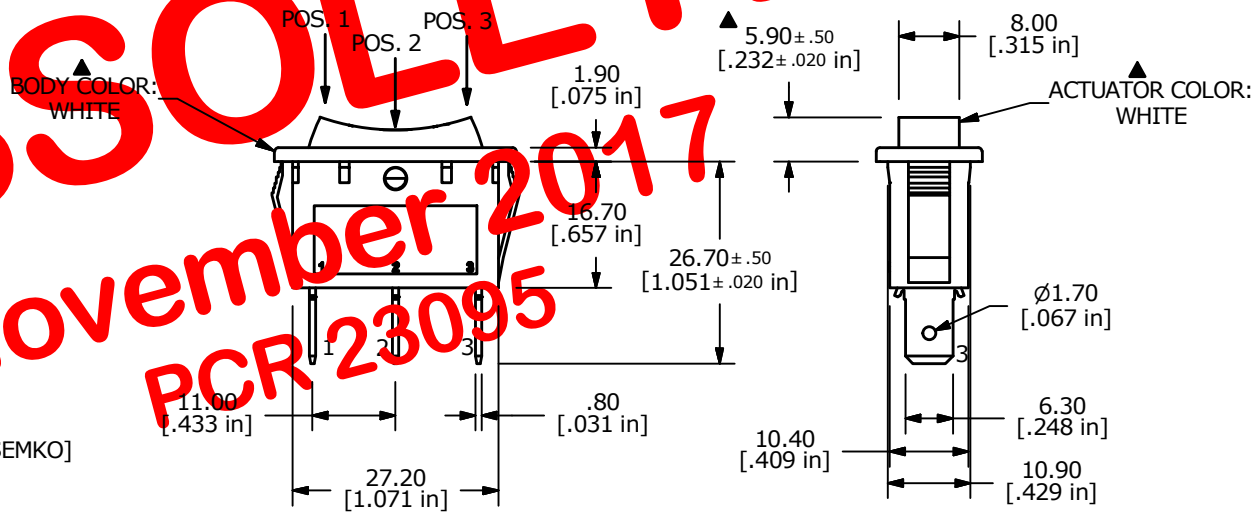

NOTE:
1. DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
   X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. CONTACT RATINGS:
   ANSI/UL 1054 AND CAN/CSA C22.2 NO.55 (E194579):
   15A @ 125VAC [cURus]
   7.5A @ 250VAC [cURus]
   EN 61058-1:2002+A2 (SE/09138-1):
   16(4)A 250V~ 1E4 T125/55 [ENEC14, SEMKO]
6. CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC INITIAL
7. INSULATION RESISTANCE: 100MΩ MIN. @ 500VDC
8. DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
9. ELECTRICAL LIFE: 6,000 CYCLES [cURus]
   10,000 CYCLES [ENEC10, SEMKO]
10. OPERATING TEMPERATURE: -20°C TO 85°C [cURus]
    -20°C TO 125°C [ENEC14, SEMKO]
11. ▲DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
B	20493	CORRECT RATINGS NOTE	02/21/12	BMA
A	20440	RELEASE FOR PRODUCTION	1/31/12	BGL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE RB145C2219

SCALE	DATE	DR	DWG	REV
1:1	1/31/2012	BGL	38-RB145C2219	B