




SWITCH	WIRE	LENGTH
SW1-1	WIRE, 22AWG AWM UL1007, YELLOW	300.0 [11.8 in]
SW1-2	WIRE, 22AWG AWM UL1007, BLUE	300.0 [11.8 in]
SW1-3	WIRE, 22AWG AWM UL1007, GREEN	300.0 [11.8 in]
SW1- (+)	WIRE, 22AWG AWM UL1007, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 22AWG AWM UL1007, BLACK	300.0 [11.8 in]

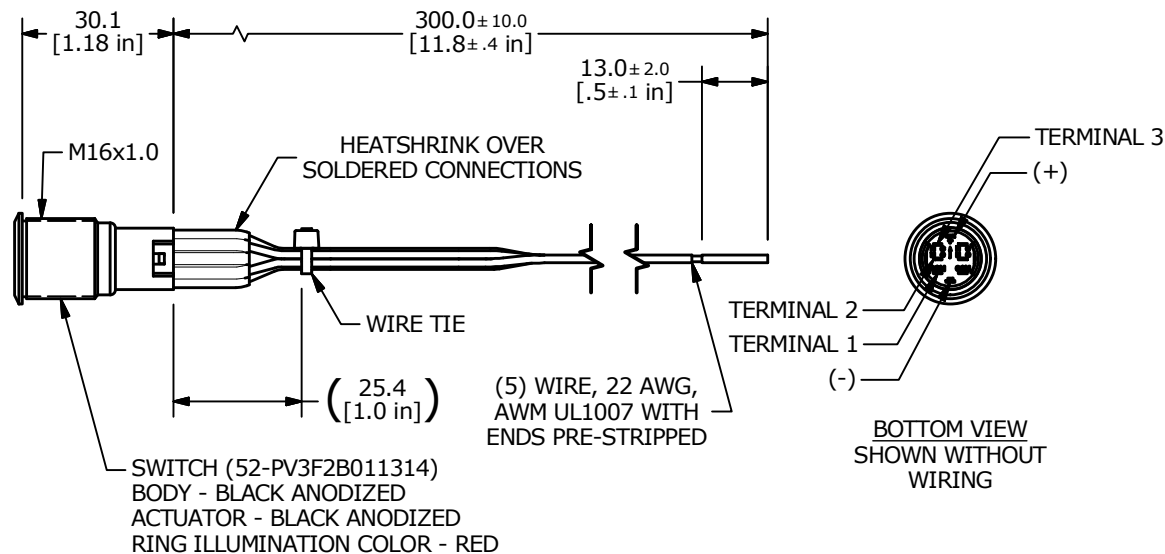

RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 8.0 [0.31 in]

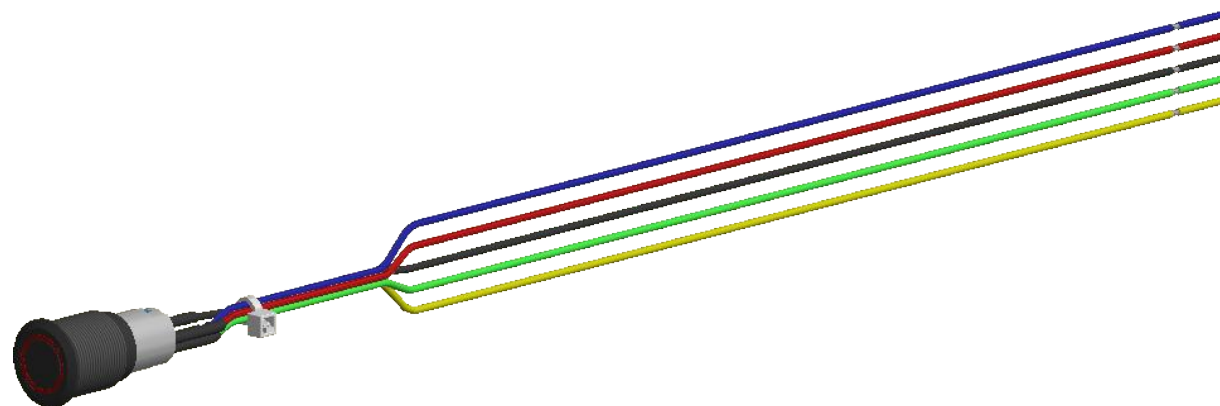

- NOTE:**
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ±0.4
 X.XX = ±0.25
 - ▲ 3. TERMINAL NUMBERS FOR REF ONLY
 4. CONTACT MATERIAL: SILVER
 5. RATING: 2A 48VDC
 - ▲ 6. LAMP VOLTAGE: 12V
 7. INGRESS RATING: IP40
 8. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 9. INSULATION RESISTANCE: 1,000 MΩ MIN.
 10. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 11. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 12. OPERATING TEMP.: -20°C to 55°C
 13. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 14. SUPPLIED HARDWARE: O-RING AND HEXNUT
 15. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.



B	23993	UPDATED NOTES	8/13/19	MJR
A	23887	NEW RELEASE	5/8/19	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV3FWB011-314				
SCALE 2:3	DATE 5/8/2019	DR MJR	DWG 52-PV3FWB011314	REV B