


PANEL CUTOUT
MAX. PANEL THICKNESS
14.0mm [.55]



▲ HIGH ACTUATOR
NICKEL PLATED

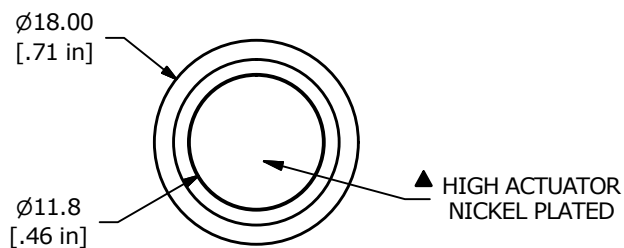

▲ BODY
NICKEL PLATED

3.9±.50
[.154±.020 in]

1.50
[.06 in]

18.5±1.0
[.73±.04 in]

30.2±1.0
[1.19±.04 in]

▲ 36.0±1.0
[1.42±.04 in]

M16x1.0

2.00
[.079 in]

3

6

.80
[.031 in]

1.80
[.071 in]

5.00
[.197 in]

.40
[.016 in]

2.80
[.110 in]

5.60
[.220 in]

TERMINAL 3


TERMINAL 6

TERMINAL 2

TERMINAL 5


TERMINAL 1

TERMINAL 4



SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-6	1-2, 4-5

(ON) = MOMENTARY



▲ DPDT ON-(ON)
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
11. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 12. HARDWARE SUPPLIED: O-RING AND HEXNUT
13. INGRESS RATING: IP40
14. 2011/65/EU (ROHS) COMPLIANT
15. LAMP VOLTAGE: NO LAMP



REV	PCR NO	DESCRIPTION	DATE	BY
D	23363	UPDATED RATING TO 2A 48VDC	5/11/18	MJR
C	22886	UPDATED RATING TO 1A 24VDC	6/19/17	MJR

TITLE PV3H2H0NN				
SCALE 3:2	DATE 12/27/2012	DR EBP	DWG 52-PV3H2H0NN	REV D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED