


PANEL CUTOUT
MAX. PANEL THICKNESS
11.0mm [.433]

ø22.00
[.866 in]




▲ (M05) LASER ETCHED
BULB SYMBOL

▲ ACTUATOR FINISH:
STAINLESS STEEL




▲ BODY FINISH:
STAINLESS STEEL

2.00
[.08 in]

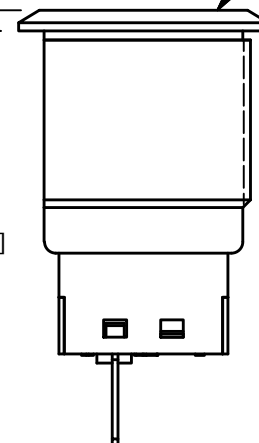


▲ 36.5±1.0
[1.44±.04 in]

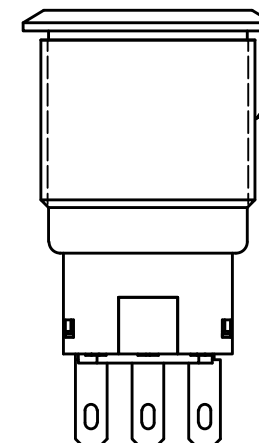


M19x1.0

2.80
[.110 in]

5.00
[.197 in]




SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
1-3	1-2



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 48VDC
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
10. OPERATING TEMP.: -20°C to 55°C
- ▲ 11. TRAVEL: 2.8mm
12. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 13. INGRESS PROTECTION: IP65
- ▲ 14. HARDWARE SUPPLIED: O-RING AND HEXNUT
15. 2011/65/EU (ROHS) COMPLIANT



B	22589	ADDED FLAT TO HOUSING	11/10/16	MJR
A	19156	INITIAL RELEASE	6/18/10	CAB
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV4F230SS-M05				
SCALE 3:2	DATE 6/18/2010	DR CAB	DWG 52-PV4F230SSM05	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED