





SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

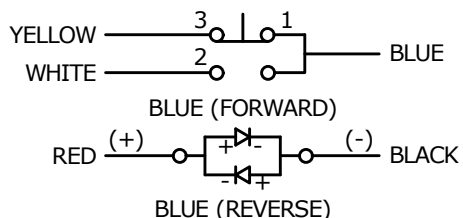

SCHEMATIC
 ON - (ON) - DPDT ILLUMINATED
 () DENOTES MOMENTARY FUNCTION



RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 11.0 [.43 in]

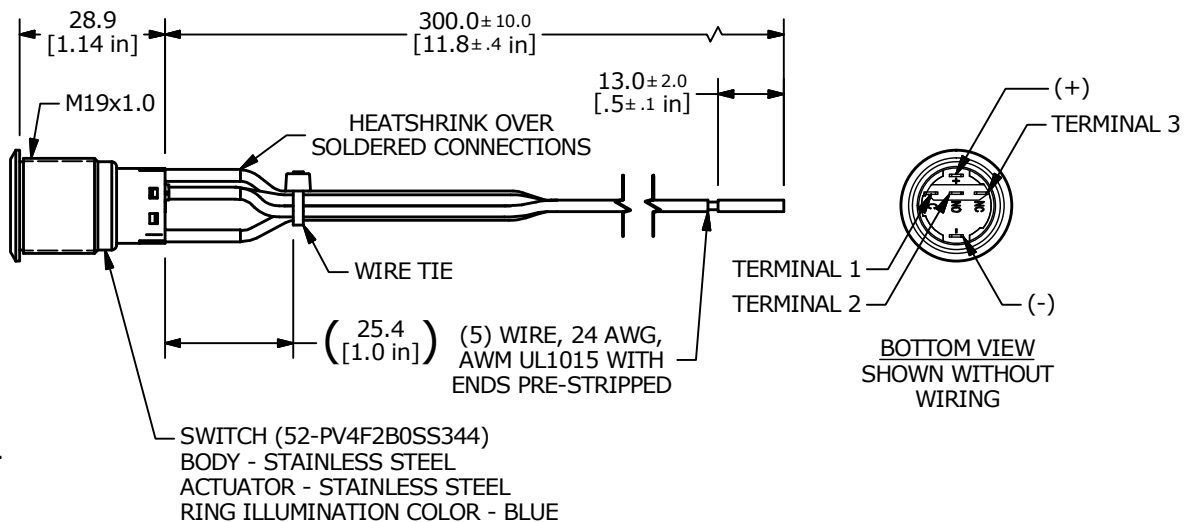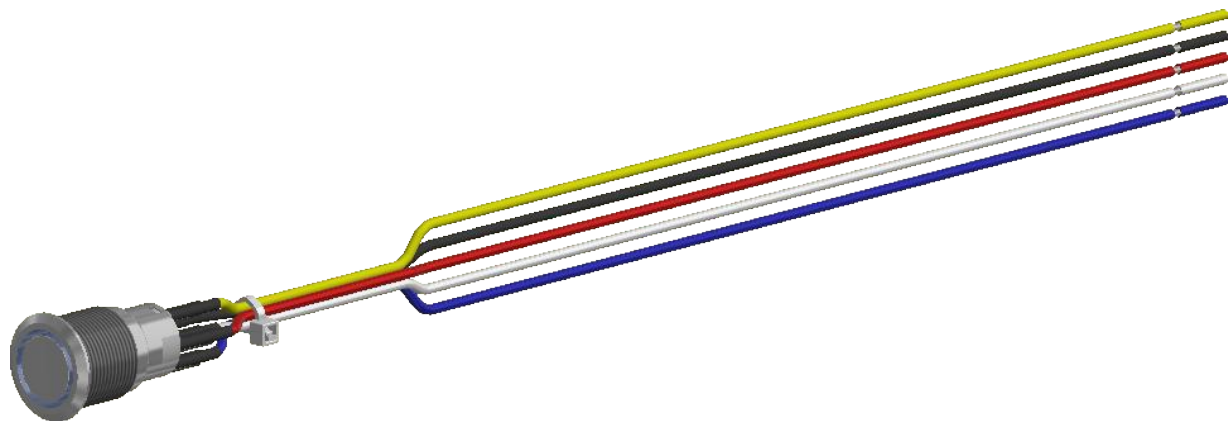

- NOTES:**
- DIMENSIONS IN MM [INCH]
 - ALL MATERIAL SHALL BE ROHS COMPLIANT
 - TERMINAL NUMBERS FOR REF. ONLY
 - CONTACT MATERIAL: SILVER
 - RATING: 2A 24VDC
 - ▲ LAMP VOLTAGE: 12V
 - INGRESS PROTECTION: IP65
 - TRAVEL: 2.8mm
 - OPERATING TEMP.: -20°C to 55°C
 - INSULATION RESISTANCE: 1,000 MΩ MIN.
 - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - ▲ DENOTES CRITICAL PARAMETER.
 - ▲ SUPPLIED HARDWARE: O-RING AND HEXNUT
 - USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

TITLE PV4FWB0SS-344				
SCALE	DATE	DR	DWG	REV
2:3	1/18/2019	MJR	52-PV4FWB0SS344	D

D	23993	UPDATED NOTES	8/13/19	MJR
C	23869	UPDATED HEATSHRINK DIM. TO 15.0	5/1/19	MJR
REV	PCR NO	DESCRIPTION	DATE	BY