





SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-4	WIRE, 24AWG AWM UL1015, PURPLE	300.0 [11.8 in]
SW1-5	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-6	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

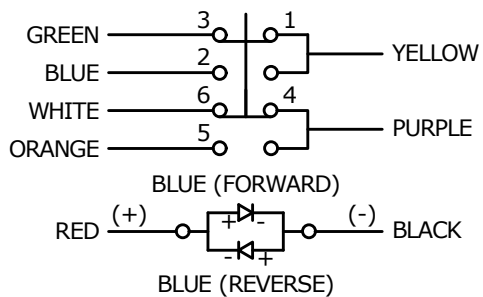


**SCHEMATIC**  
ON - ON - DPDT ILLUMINATED



**RECOMMENDED PANEL CUTOUT**  
MAX. PANEL THICKNESS 11.0 [.43 in]

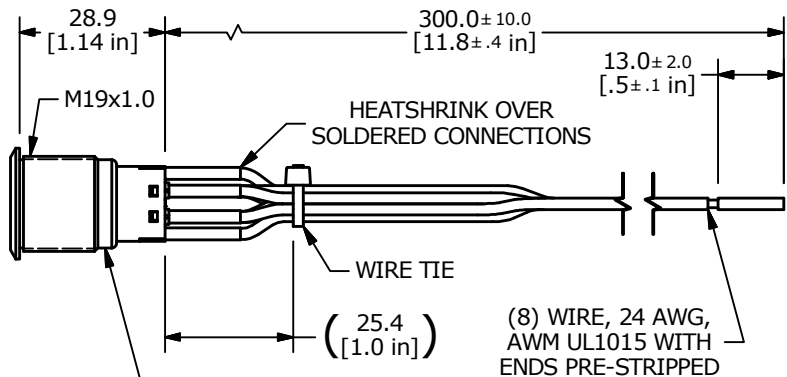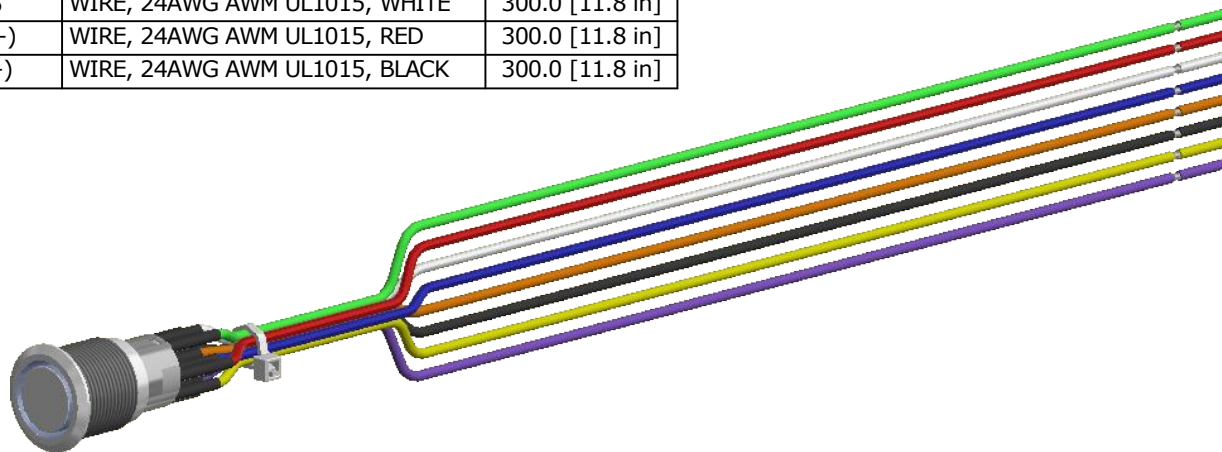

SWITCH (52-PV4F2G0SS344)  
BODY - STAINLESS STEEL  
ACTUATOR - STAINLESS STEEL  
RING ILLUMINATION COLOR - BLUE

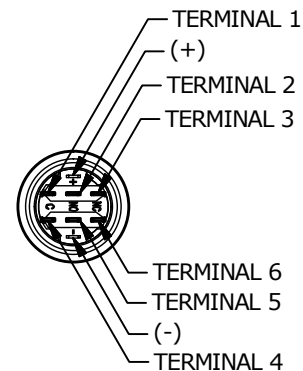

**BOTTOM VIEW**  
SHOWN WITHOUT WIRING

- NOTES:**
- DIMENSIONS IN MM [INCH]
  - ALL MATERIAL SHALL BE ROHS COMPLIANT
  - TERMINAL NUMBERS FOR REF. ONLY
  - CONTACT MATERIAL: SILVER
  - RATING: 2A 24VDC
  - ▲ LAMP VOLTAGE: 12V
  - INGRESS PROTECTION: IP65
  - TRAVEL: 2.8mm
  - OPERATING TEMP.: -20°C to 55°C
  - INSULATION RESISTANCE: 1,000 MΩ MIN.
  - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
  - ▲ DENOTES CRITICAL PARAMETER.
  - ▲ SUPPLIED HARDWARE: O-RING AND HEXNUT
  - USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.



D	23994	UPDATED NOTES	8/13/19	MJR
C	23869	UPDATED HEATSHRINK DIM. TO 15.0	5/1/19	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV4FWG0SS-344				
SCALE	DATE	DR	DWG	REV
2:3	1/18/2019	MJR	52-PV4FWG0SS344	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED