


▲ TRANSPARENT BUTTON
LED COLOR: GREEN



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ±0.4mm
X.XX = ±0.25mm
 3. RATING: DC 30V, 0.3A
 4. OPERATING FORCE: 200 ±100gf
 5. TRAVEL: 3.3mm FULL TRAVEL
 6. LIFE CYCLES: 10,000 CYCLES
 7. OPERATING TEMPERATURE: -20~C to 70~C
 8. CONTACT RESISTANCE: 20mW MAX.
 9. INSULATION RESISTANCE: 100MW MIN@ 500VDC.
 10. ▲ DENOTES CRITICAL PARAMETER.
 11. 2011/65/EU (RoHS) COMPLIANT.

LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @20mA	V	2.1 TYP-2.5 MAX
LUMINOUS INTENSITY @ 20mA	mcd	400 TYP

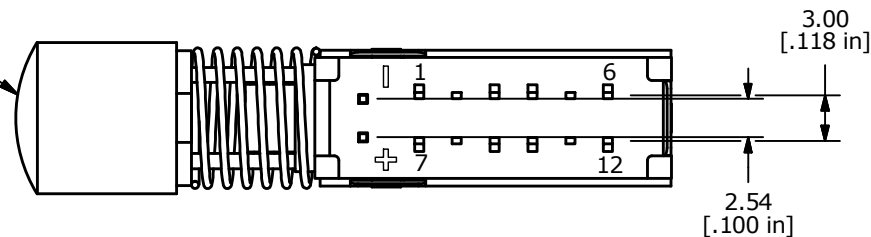

A	22760	New Release	3/14/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE	WBL4UOAGQR05CLR			
SCALE	DATE	DR	DWG	REV

2:1	3/14/2017	MW	B400017	A
-----	-----------	----	---------	---

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED