


- NOTE:
1. ALL DIMENSIONS IN MM[INCH].
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 - ▲ 4. CONTACT MATERIAL: GOLD OVER SILVER
 5. CONTACT RATING: 0.3A @ 125VAC
 6. OPERATING FORCE: 800 ± 300 gf-cm
 7. OPERATING TEMP: -30°C to 85°C
 - ▲ 8. CIRCUIT SP: 12 POSITION NO STOPS.
 9. DIELECTRIC STRENGTH: 500VAC FOR 1 MIN.
 - ▲ 10. HARDWARE SUPPLIED ON SWITCH: LOCKWASHER, HEXNUT
 11. ▲ DENOTES CRITICAL PARAMETER.

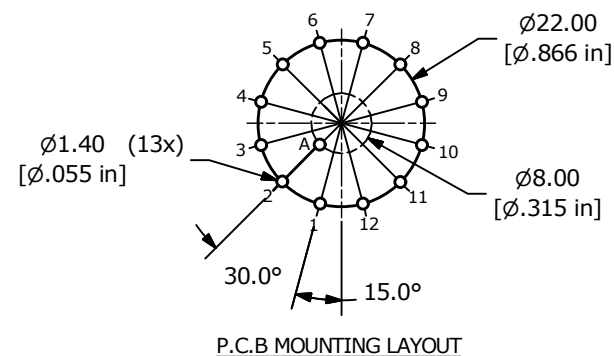

B	23845	correct pcb layout	4/9/19	MW
A	22232	RELEASED FOR PRODUCTION	4/11/16	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE KC10A7.001NPF				
SCALE	DATE	DR	DWG	REV
1.5:1	4/11/2016	MJR	G510613	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED