


- NOTES:
1. ALL DIMENSION IN MM [INCH]
  2. GENERAL TOLERANCE: 0.0 $\pm$ 0.4; 0.00 $\pm$ 0.25
  3. TERMINAL NUMBERS FOR REF ONLY
  4. CONTACT RATING SWITCHING: 150mA 250V AC/DC
  5. CIRCUIT: 1P, 4 POSITION, 30 INDEX
  6. OPERATING FORCE: 425 $\pm$ 100 Grams/cm Standard
  7. OPERATING TEMP: -30°C to 85°C
  8. DIELECTRIC STRENGTH: 1000 V RMS min @sea level
  9. HEX NUT, LOCK WASHER, & STOP RING NOT SHOWN
  10. PIN 9 IS FOR STAB, ONLY, NOT ELEC. CONNECTION

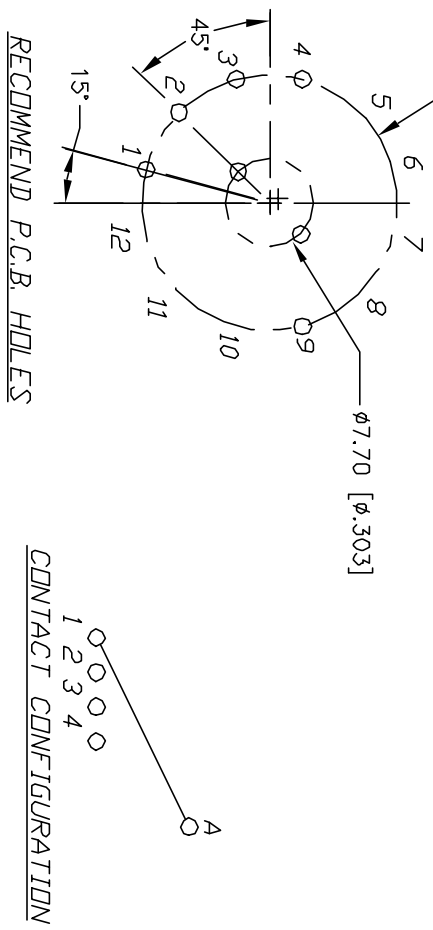

**E-SWITCH®**

RECOMMEND P.C.B. HOLES

CONTACT CONFIGURATION

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11252	RELEASED FOR PRODUCTION	02/16/01	RJC

TITLE	SCALE	DATE	DR	DWG	REV
KC-14-A-01-N-L-S	1.5:1	02/15/01	RJC	G510889	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED