





- NOTES:
1. ALL DIMENSION IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. CONTACT RATING SWITCHING: 150mA, 250V AC/DC
350mA, 110V AC/DC
 5. OPERATING FORCE: 425±100 CM/STANDARD
 6. OPERATING TEMP: -30° to 85°C
 7. CIRCUIT 2 Pole, 5 POSITIONS, 30° INDEX.
 8. DIELECTRIC STRENGTH: 1000V RMS min. @SEA LEVEL
 9. DESIGNATE MAJOR DIMENSIONS
 10. LOCK NUT AND WASHER NOT SHOWN.

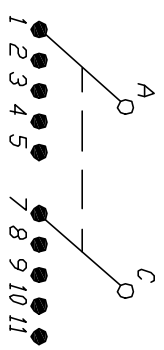

CONTACT CONFIGURATION
Timing: (BBM) non-shorting

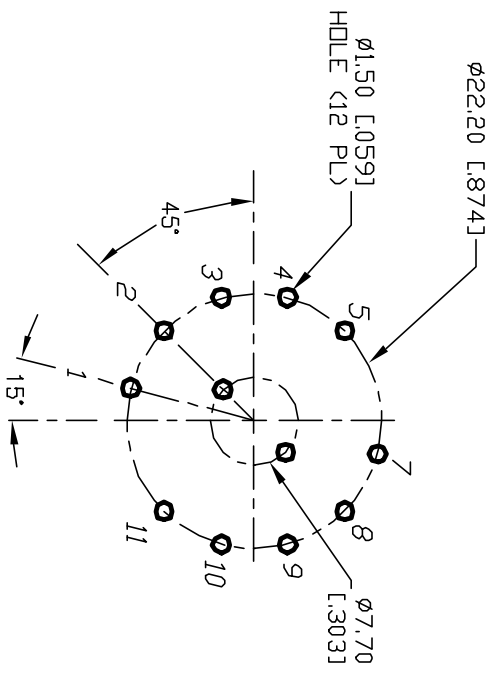

RECOMMENDED P.C.B. LAYOUT

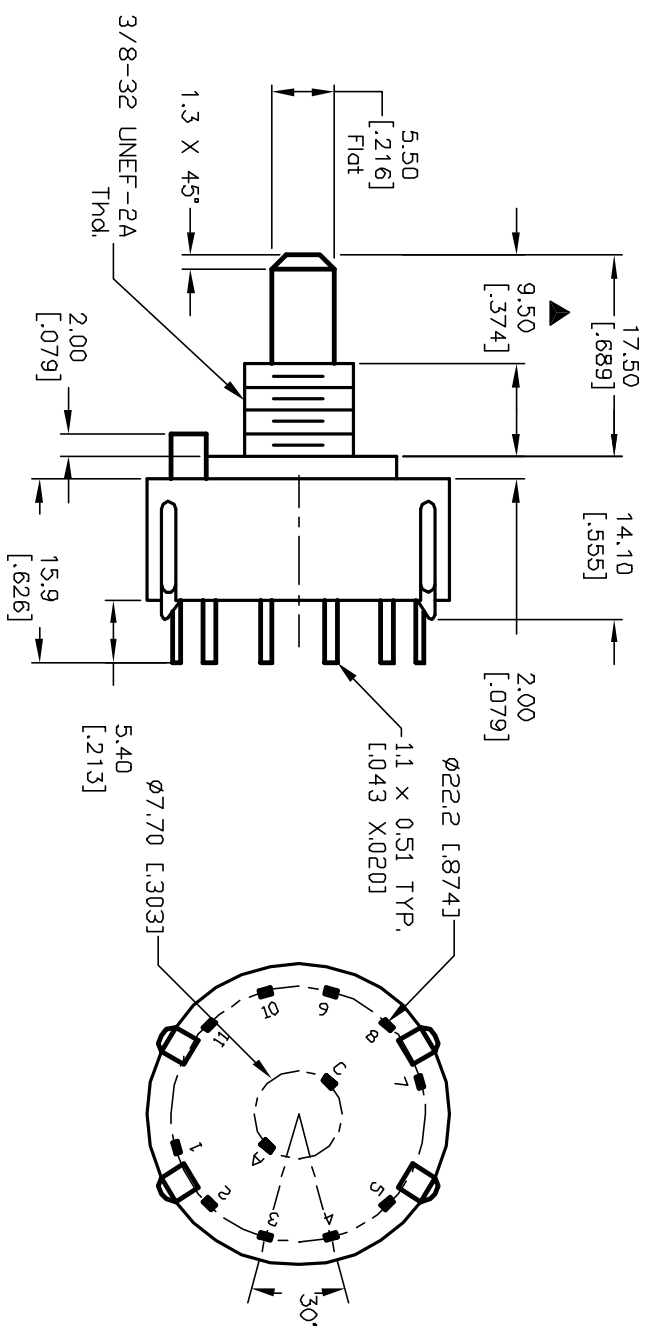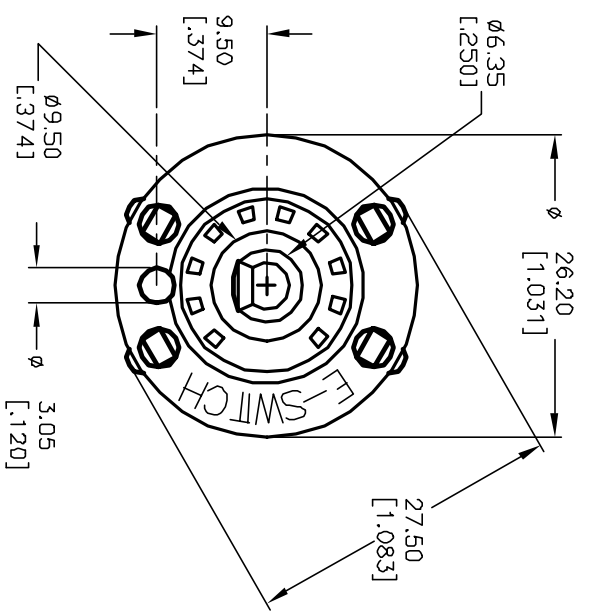

E-SWITCH®

KC-25-E-01-N-P-S

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	11514	RELEASED FOR PRODUCTION	7/30/01	CJB

TITLE	SCALE	DATE	DR	DWG	REV
KC-25-E-01-N-P-S	1.5:1	7/31/01	CJB	G510900	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED