



P.C.B. PANEL MOUNTING

PCB THICKNESS	X
0.30-1.25 (.030-.049)	19.2 (.756)
1.25-2.00 (.049-.079)	19.4 (.764)
2.00-3.00 (.079-.118)	19.8 (.780)

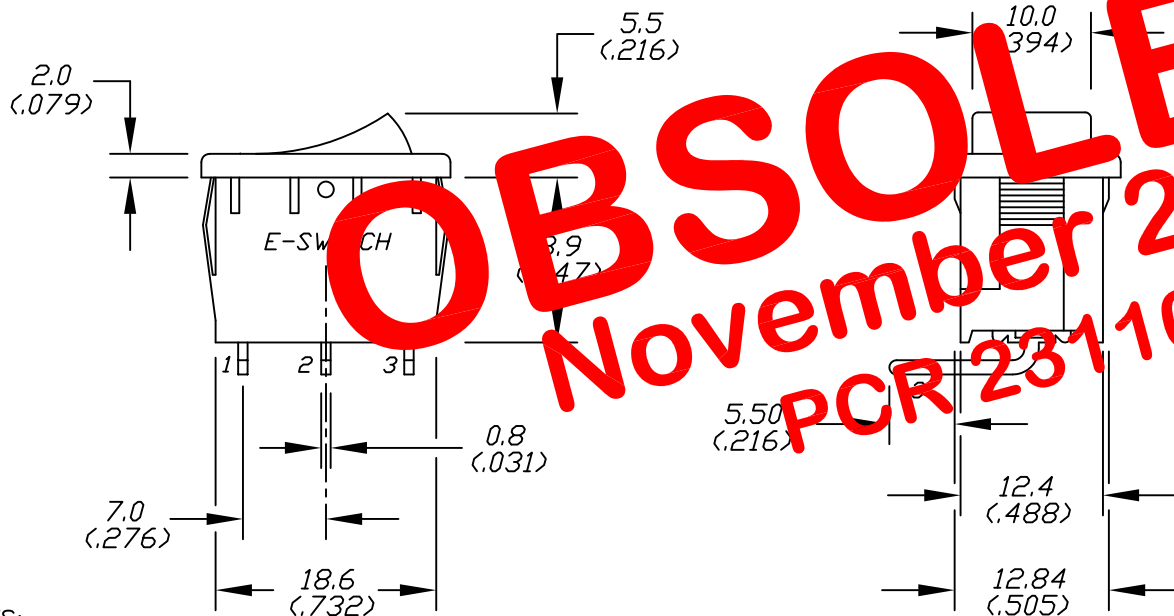

OBSOLETE  
 November 2017  
 PCR 23110



CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X±0.4, X.XX±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 15A @125V, 6A 250VAC
5. MECHANICAL LIFE: 15,000 CYCLES
6. ELECTRICAL LIFE: 10,000 CYCLES
7. CONTACT RESISTANCE: <20m-ΩHMS
8. INSUL. RESISTANCE: >1,000m-ΩHMS
9. DIELECTRIC STRENGTHS: >1500V MIN, >3000V BETWEEN POLES

**E-SWITCH®**

TITLE					R1966 C BLK BLK G R				
SCALE	DATE	DR	DWG	REV					
1.5:1	12/06/00	PML	M302207	A					

A	11090	RELEASED FOR PRODUCTION	12/06/00	PML
REV.	ECN No.	DESCRIPTION	DATE	CHKD

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED