




CIRCUIT LAYOUT

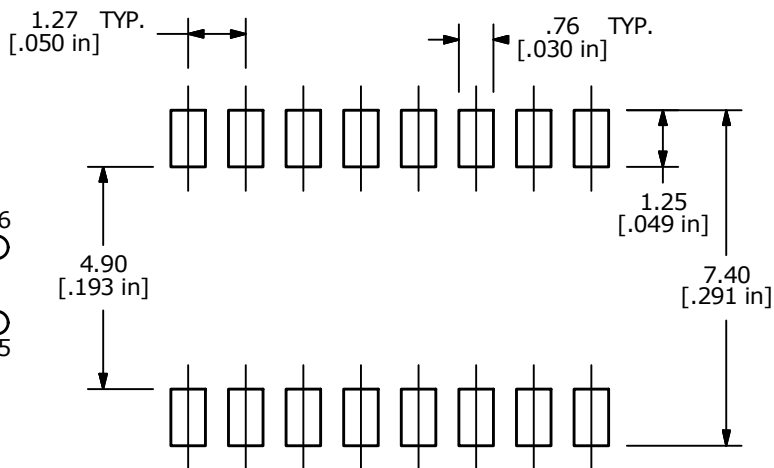

PC LAYOUT

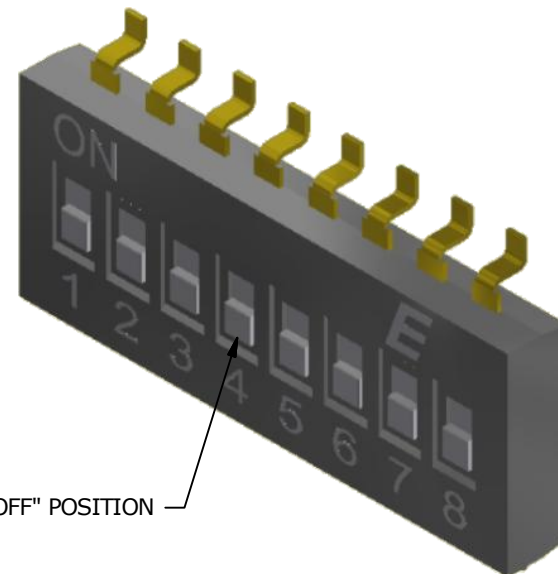

ALL 8 POLES SET TO "OFF" POSITION

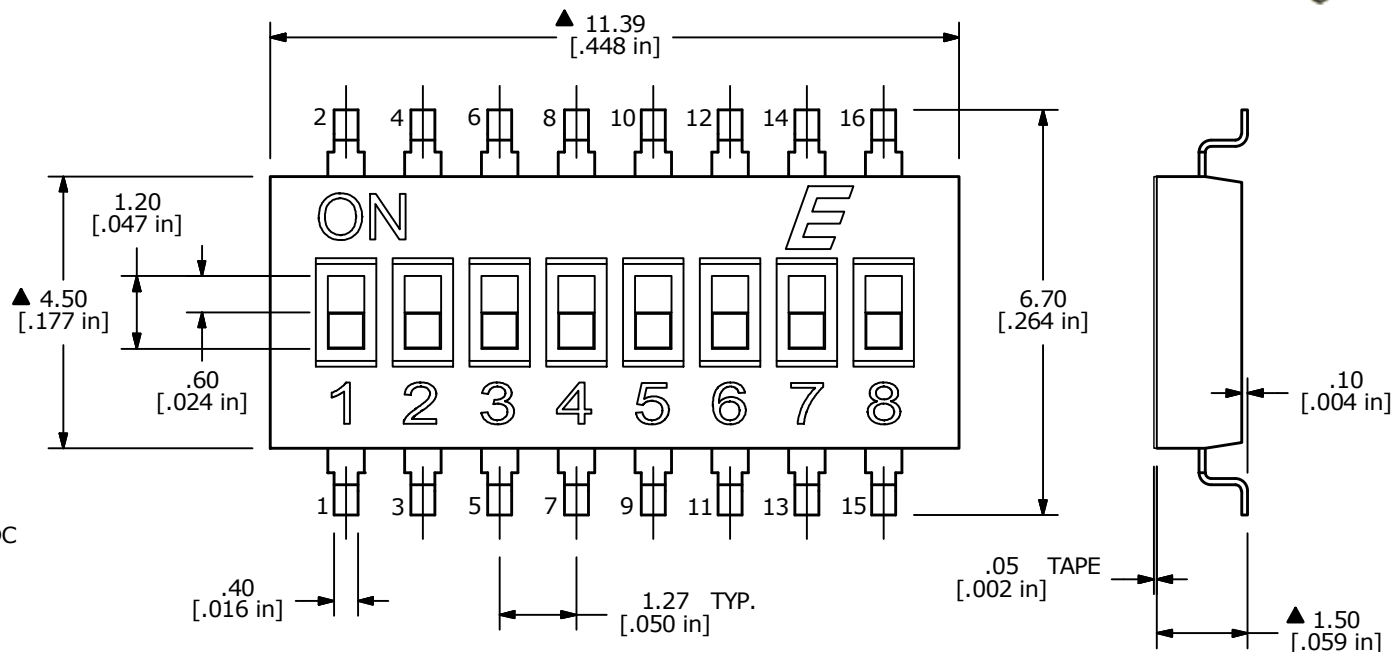

NOTE:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: 500± 100 gf
5. TRAVEL: 0.6± 0.25mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: 4,000 PCS PER REEL
- ▲ 13. ALL 8 POLES SET TO "OFF" POSITION.
14. ▲ DENOTES CRITICAL PARAMETER.



B	23464	remove ROHS note from drawing	7/18/18	MW
A	20892	RELEASED FOR PRODUCTION	11/27/12	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE KAN1108RR-OFF				
SCALE	DATE	DR	DWG	REV
8:1	11/27/2012	EBP	N111195	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED