




PC LAYOUT

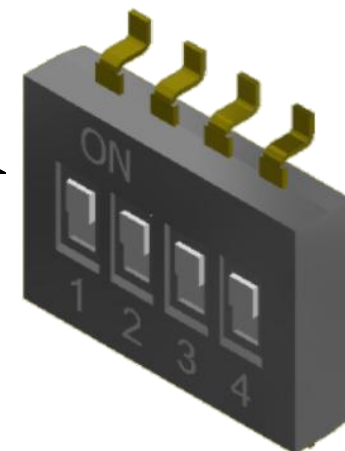


CIRCUIT LAYOUT

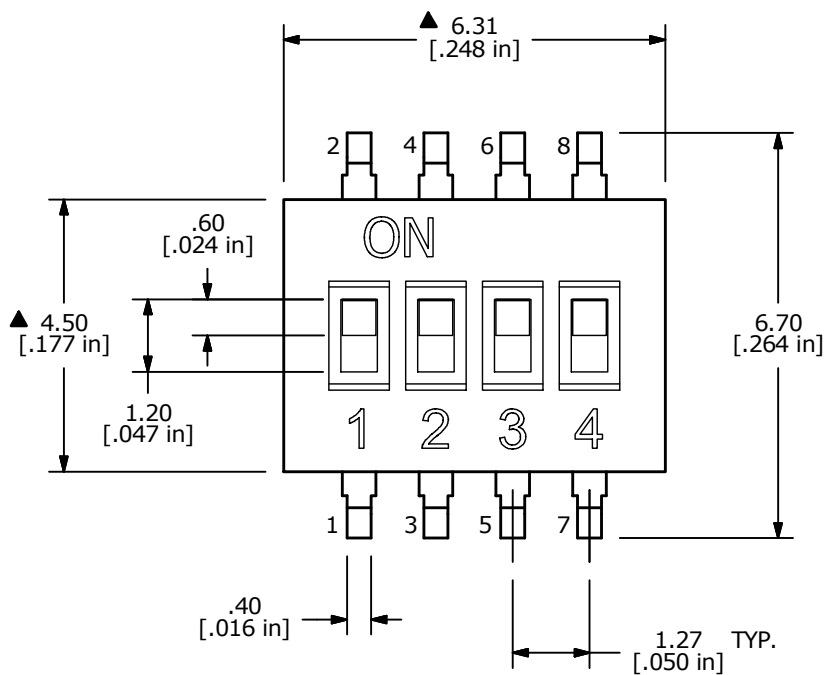

▲ SWITCHES IN THE "ON" POSITION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: 500 ± 100gf
5. TRAVEL: 0.6 ± 0.25mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: TAPE and REEL
13. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 14. ALL SWITCHES SHIPPED IN THE "ON" POSITION

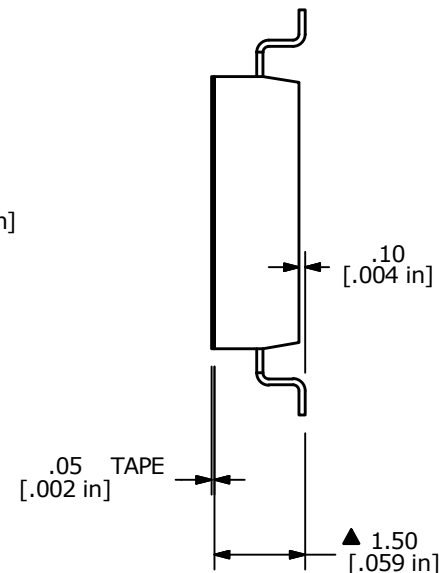

D	23464	remove ROHS note from drawing	7/18/18	MW
C	22825	UPDATE PRINT	4/27/17	MW
B	16105	ADD NOTE 8	6/6/06	CT
A	13333	RELEASE FOR PRODUCTION	7/30/03	AR
REV	PCR NO	DESCRIPTION	DATE	BY



TITLE KAN1104RR-ON (ON POSITION)				
SCALE	DATE	DR	DWG	REV
8:1	7/13/2007	BLR	N111204	D