
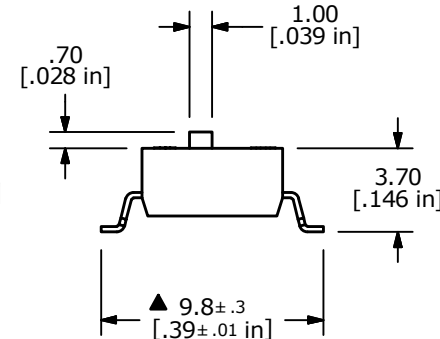


▲ CIRCUIT - 8 POSITION

POS. 1 DESIGNATE  
PIN #1 LOCATION

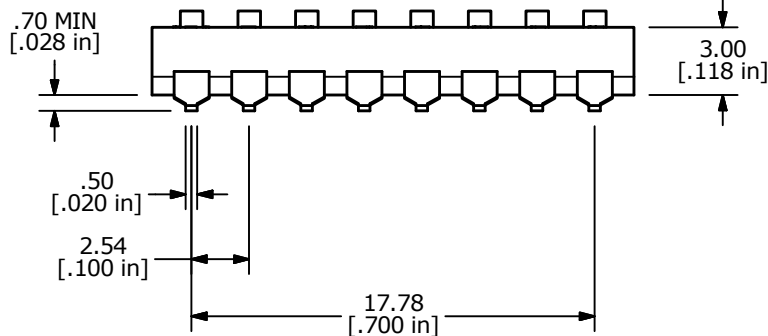

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ±0.4  
X.XX = ±0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC (SWITCH)  
100mA @50VDC (CARRY)
- ▲ 5. CONTACT MATERIAL:  
CONTACTS: (MOVABLE) COPPER W/GOLD PLATE  
TERMINALS: BRASS W/GOLD PLATE
6. INSULATION RESISTANCE: 100 MΩ MIN. @500VDC
7. CONTACT RESISTANCE: 50 mΩ MAX INITIAL
8. OPERATING TEMP: -20C to +85C
9. STORAGE TEMP: -40C to +85C
10. ELECTRICAL LIFE: 2000 CYCLES
- ▲ 11. PACKAGE: TAPE AND REEL (700 PER REEL)  
WITH ALL POLES IN THE "OFF" POSITION
12. ▲ DENOTES CRITICAL PARAMETER.
13. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 14. OPERATING FORCE: 1000 GRAMS MAX
15. 2011/65/EU (ROHS) COMPLIANT



A	23402	RELEASED FOR PRODUCTION	6/20/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE KAE08LGGR (Tape and Reel)				
SCALE	DATE	DR	DWG	REV
3:1	6/19/2018	MW	N800308	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED