



P.C.B. MOUNTING

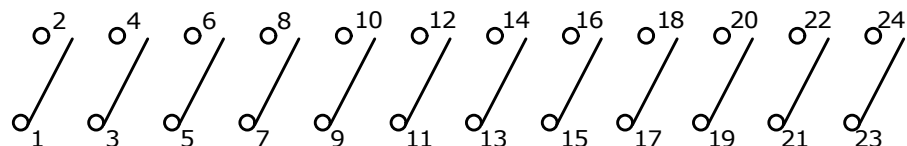

CIRCUIT - 12 POSITION

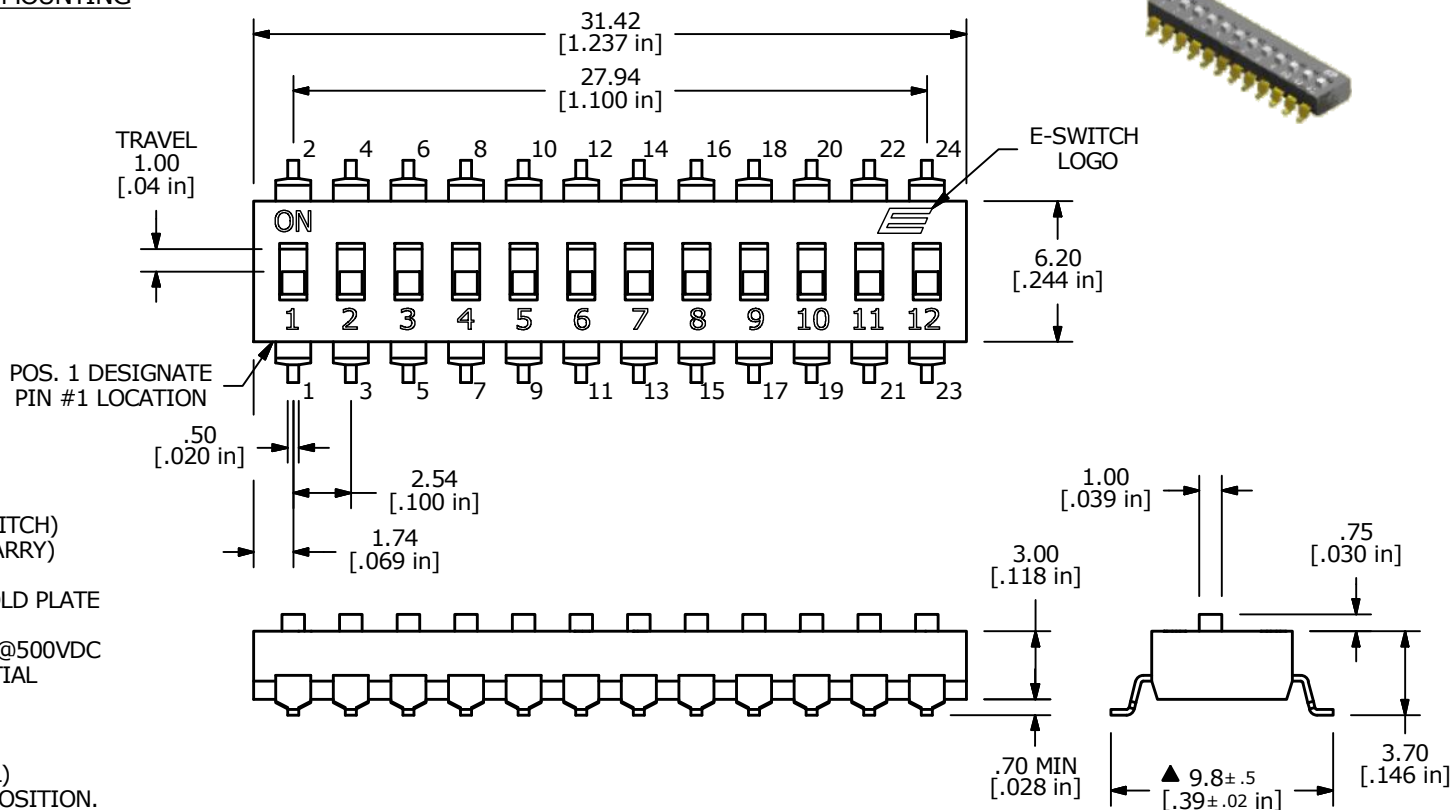

NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (SWITCH)
100mA @50VDC. (CARRY)
- ▲ 5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) COPPER W/GOLD PLATE
TERMINALS: BRASS W/GOLD PLATE
6. INSULATION RESISTANCE; 100 MΩ MIN. @500VDC
7. CONTACT RESISTANCE; 50 mΩ MAX INITIAL
8. OPERATING TEMP: -20°C to +85°C
9. STORAGE TEMP: -40°C to +85°C
10. ELECTRICAL LIFE: 2000 CYCLES
- ▲ 11. PACKAGE: TAPE and REEL (700 PER REEL)
WITH ALL POLES IN THE "OFF" POSITION.
12. ▲ DENOTES CRITICAL PARAMETER.
13. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 14. OPERATING FORCE: 1000 GRAMS MAX
15. 2011/65/EU (ROHS) COMPLIANT.



A	22754	RELEASED FOR PRODUCTION	3/8/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE KAE12LGGR				
SCALE	DATE	DR	DWG	REV
3:1	3/8/2017	MW	N800312	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED