
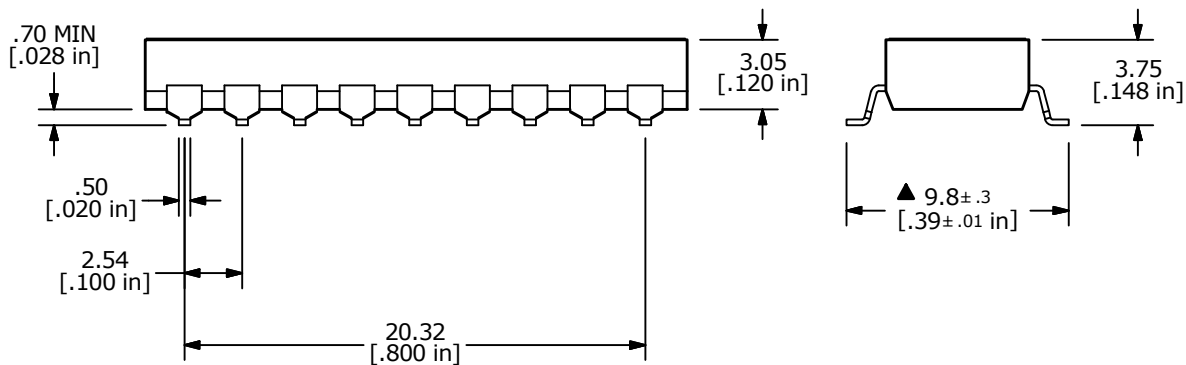


NOTES:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT RATINGS: 25mA @24VDC. (SWITCH)
100mA @50VDC. (CARRY)
- ▲ 5. CONTACT MATERIAL:
CONTACTS: (MOVABLE) COPPER W/GOLD PLATE
TERMINALS: BRASS W/GOLD PLATE
6. INSULATION RESISTANCE; 100 MΩ MIN. @500VDC
7. CONTACT RESISTANCE; 50 mΩ MAX INITIAL
8. OPERATING TEMP: -20°C TO +85°C
9. STORAGE TEMP: -40°C TO +85°C
10. ELECTRICAL LIFE: 2000 CYCLES.
- ▲ 11. PACKAGE: TUBE (22 PER TUBE) WITH ALL POLES IN THE "OFF" POSITION
12. ▲ DENOTES CRITICAL PARAMETER.
13. DIELECTRIC STRENGTH: 500VAC MIN FOR 1 MINUTE
- ▲ 14. OPERATING FORCE: 1000 GRAMS MAX.
15. 2011/65/EU(ROHS) COMPLIANT.

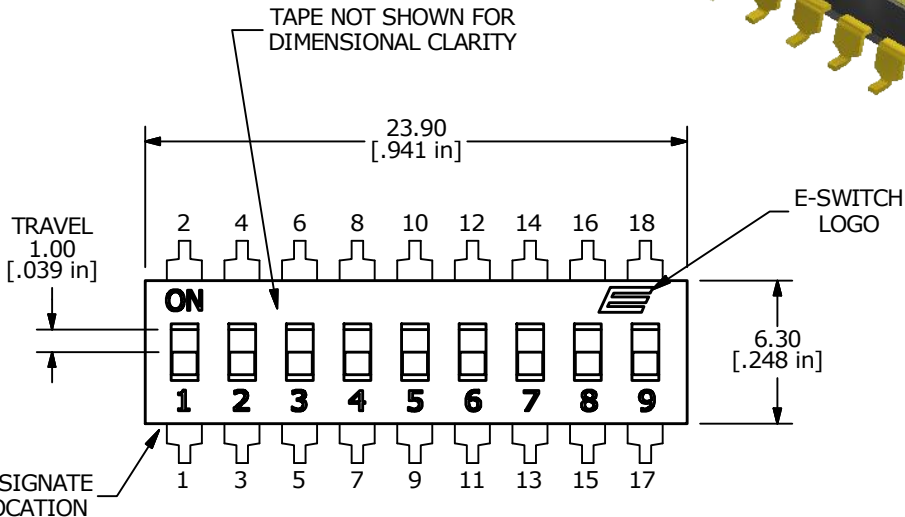

A	23210	RELEASED FOR PRODUCTION	2/13/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE KAE09TGGT				
SCALE	DATE	DR	DWG	REV
2:1	2/12/2018	MW	N801114	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED