


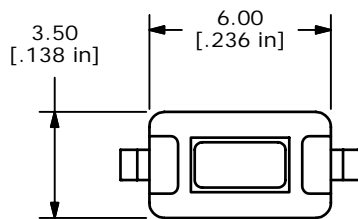



RECOMMENDED P.C.B. LAYOUT

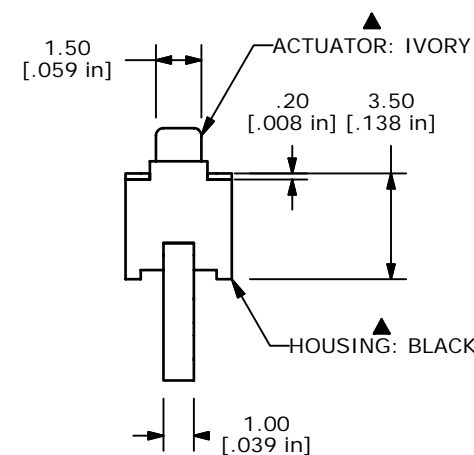

ISOMETRIC

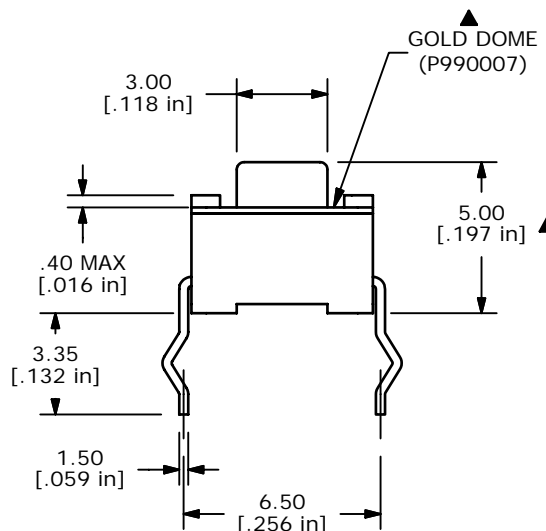

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲5. OPERATING FORCE: 180 ± 50 gms
6. TRAVEL: 0.25 ± .1mm
7. CONTACT RESISTANCE: 100 mΩ MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 40,000 CYCLES MIN.
- ▲9. CONTACT MATERIAL: GOLD
- ▲10. PACKAGE: BULK 1,000 PER BAG
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT



B	17202	ADDED GOLD DOME LEADER	4/18/07	TN
A	17127	RELEASED FOR PRODUCTION	3/20/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TL1107BF180WR				
SCALE	DATE	DR	DWG	REV
4:1	4/18/2007	TN	P010331	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED