
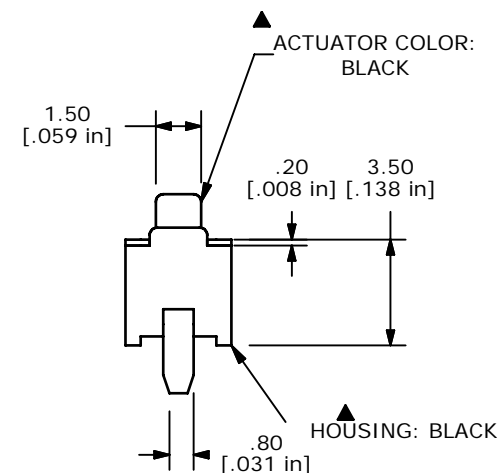
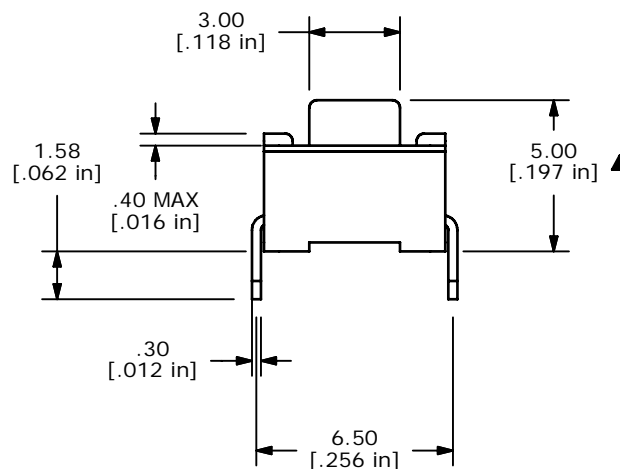



RECOMMENDED P.C.B. LAYOUT



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
 3. TERM. NOS. FOR REFERENCE ONLY.
 4. RATING: 12VDC, 50mA
 - ▲5. OPERATING FORCE: 180 ± 50 gms
 6. TRAVEL: 0.25 +0.2/- 0.1mm
 7. CONTACT RESISTANCE: 100 mΩ MAX. (INITIAL)
 8. MECHANICAL/ELECTRICAL LIFE: 50,000 CYCLES MIN.
 - ▲9. SILVER CONTACTS
 - ▲10. PACKAGE: BULK 1,000 PER BAG
 11. ▲ DENOTES CRITICAL PARAMETER
 12. 2002/95/EC (ROHS) COMPLIANT

E-SWITCH®

TITLE TL1107BF180BQ

| | | | | |
|-----|--------|------------------------|----------|----|
| C | 20822 | RERELEASED AND REDRAWN | 10/12/12 | rc |
| REV | PCR NO | DESCRIPTION | DATE | BY |

| | | | | |
|-------|------------|----|---------|-----|
| SCALE | DATE | DR | DWG | REV |
| 4:1 | 10/12/2012 | rc | P010383 | C |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED