




P.C.B MOUNTING





CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY.
4. TRAVEL: 0.25mm +0.2/-0.1
5. RATING: 50mA, 12VDC
6. OPERATING FORCE: 160± 50gf
7. CONTACT RESISTANCE: 100M OHM MAX.
8. ▲ DENOTES CRITICAL PARAMETER
- ▲9. PACKAGING: TAPE AND REEL 1,200 PCS PER
- ▲10. 2002/95/EC (ROHS) COMPLIANT

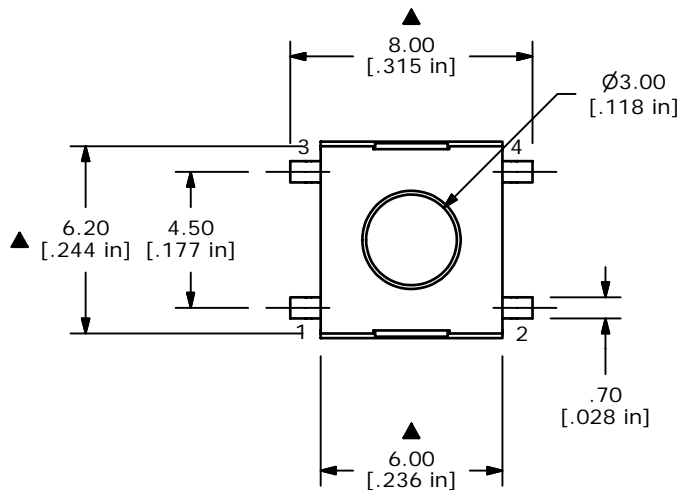

ISOMETRIC

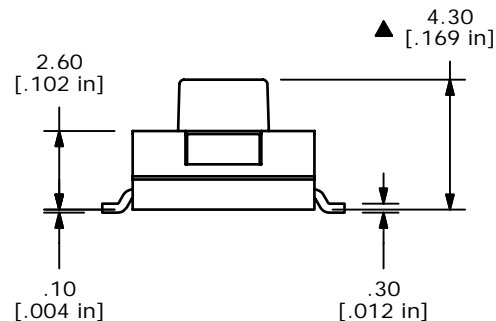

TERMINALS TO BE COLPLANAR WITH IN 0.10mm



TITLE TL3303AF160QG

A	17424	RELEASED FOR PRODUCTION	7/02/07	TN
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE	DATE	DR	DWG	REV
4:1	7/2/2007	TN	P010429	A