
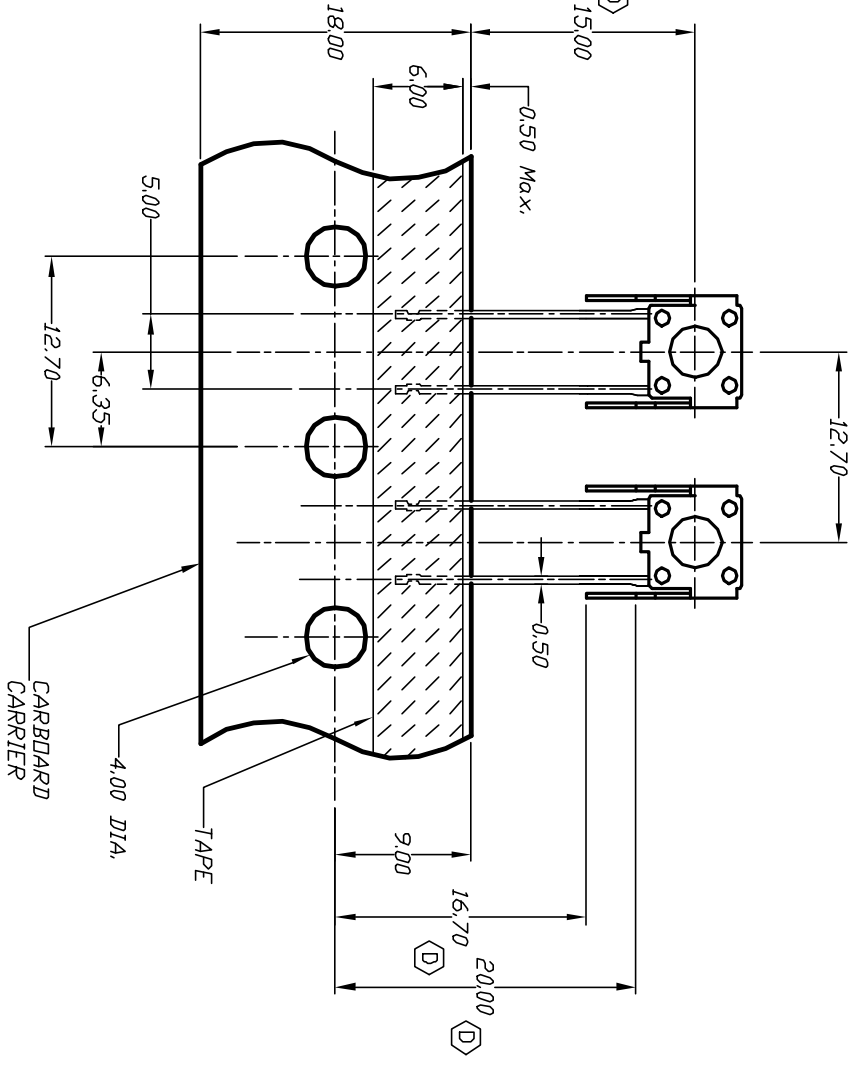


CIRCUIT: SPST
CONTACT CONFIGURATION

RECOMMEND P.C.B. LAYOUT

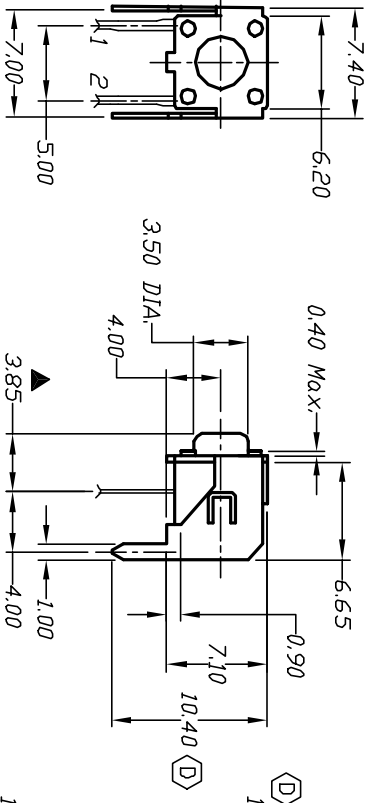

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 50mA, @12VDC
5. OPERATING FORCE: 100±50gf
6. TRAVEL: 0.25 +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 milliohms Max.
8. CARRIER IS FOLDED EVERY 25 PITCHES
(24 SWITCHES PER FOLD)
9. 700 SWITCHES PER BOX
10. DESIGNATE MAJOR DIMENSIONS

D	13229	UPDATE DIMENSIONS	6/18/03	AR
C	13210	NOTE 9 WAS 1000	6/13/03	AR
B	10148	TL 58V Was TL 58A	3/15/99	
A	10046	RELEASED FOR PRODUCTION	12/10/98	
REV.	ECN NO.	DESCRIPTION	DATE	CHK'D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED		SCALE	DATE	DR	DWG	REV
TITLE		2:1	12/10/98	MM	P010583	D
E-SWITCH®		TL 58 V F100 Q				