



OBSOLETE  
MAY 2019  
pcr 23876

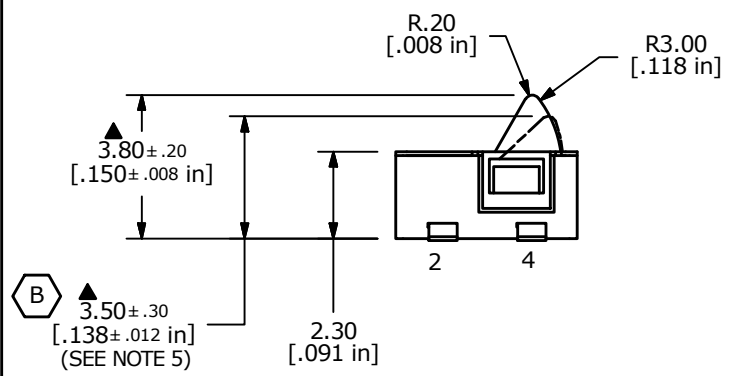

- NOTES:
1. ALL DIMENSIONS IN MM
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REFERENCE ONLY.
  - ▲4. RATING: 1mA @ 5VDC
  - ▲5. OPERATING POSITION = 3.50 ± 0.30
  - ▲6. OPERATING FORCE: <50 gf
  7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
  8. MECHANICAL / ELECTRICAL LIFE: 30,000 min.
  9. INSULATION RESISTANCE: 100 MEGA OHMS min.
  10. OPERATING TEMPERATURE: -25° C TO 70° C
  11. DIELECTRIC STRENGTH: 100 VAC FOR 1 MINUTE.
  12. PACKAGE: POLYBAG/250 PIECES PER
  13. ▲ DENOTES CRITICAL PARAMETER
  14. 2002/95/EC (ROHS) COMPLIANT
  15. PLATING: CONTACTS - 20µin GOLD  
TERMINALS - GOLD FLASH



B	21197	3.50±.30 WAS 2.90±.30	8/7/13	EBP
A	21175	RELEASE FOR PRODUCTION	7/16/13	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE TD1146R				
SCALE	DATE	DR	DWG	REV
	7/16/2013	EBP	Q940001	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED