

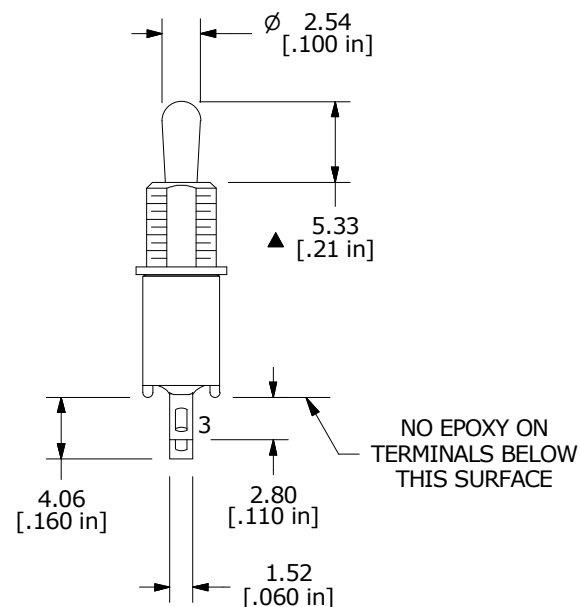


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3	OPEN	2-1

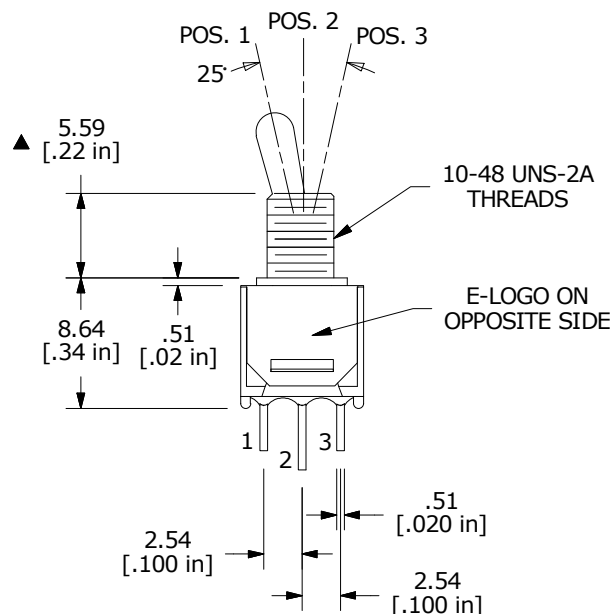

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ± 0.4
 X.XX = ± 0.25
 - TERMINAL NUMBERS FOR REF ONLY
 - PLATING MATERIAL: SILVER
 - RATING: 3 AMPS @ 120VAC or 28VDC UL, CUL
 1 AMPS @ 250VAC UL, CUL
 - ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 - DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL
 - OPERATING TEMP.: -30°C to 85°C
 - ▲ DENOTES CRITICAL PARAMETER.
 - HARDWARE TO BE SHIPPED BULK
 T200001 - HEXNUT - QTY 2
 T200000 - LOCKWASHER - QTY 1
 T200002 - LOCKRING - QTY 1
 - 2011/65/EU (ROHS) COMPLIANT



A	22955	New Release	8/15/17	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 200MSP3T2B1M1QEH				
SCALE	DATE	DR	DWG	REV
2:1	8/15/2017	MW	ST212055	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED