

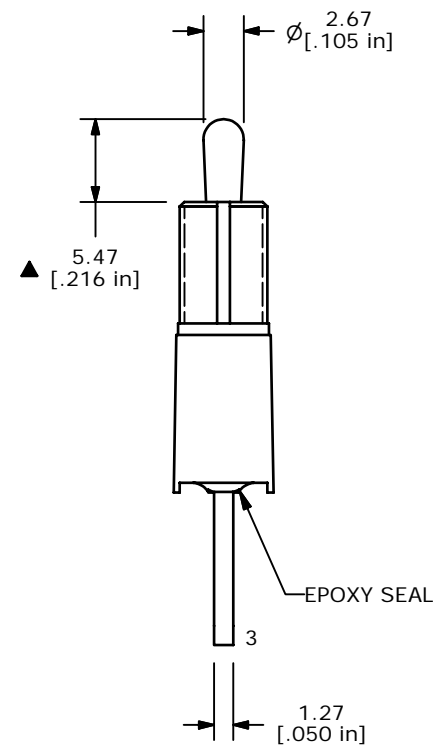


| SWITCH FUNCTION |        |        |
|-----------------|--------|--------|
| POS. 1          | POS. 2 | POS. 3 |
|                 |        |        |
| ON              | NONE   | ON     |
| 2-3             | N/A    | 2-1    |

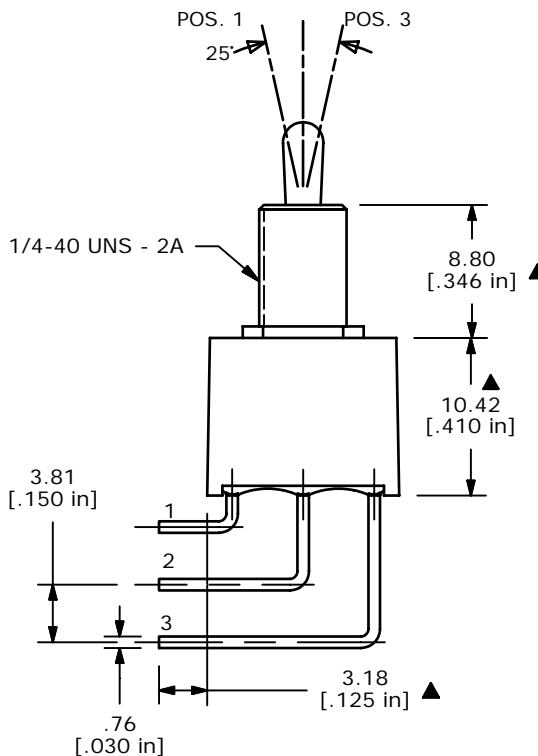

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲4. PLATING MATERIAL: SILVER
5. RATING: 2A @ 250 VAC  
5A @ 125VAC OR 28VDC
6. ELECTRIC LIFE: 30,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT



**E-SWITCH®**

|     |        |                         |         |    |
|-----|--------|-------------------------|---------|----|
| B   | 16368  | CLEANED UP DWG.         | 8/28/06 | BO |
| A   | 15926  | RELEASED FOR PRODUCTION | 4/3/06  | PH |
| REV | PCR NO | DESCRIPTION             | DATE    | BY |

|                        |               |       |             |       |
|------------------------|---------------|-------|-------------|-------|
| TITLE 100AWSP1T2B1M7QE |               |       |             |       |
| SCALE 2:1              | DATE 4/3/2006 | DR PH | DWG T101039 | REV B |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED