


RECOMMENDED P.C.B. LAYOUT






CIRCUIT: DPDT
CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS. 1	PDS. 2	PDS. 3
DN	DFP	DN
2-3,5-6	DPEN	2-1,5-4

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. CONTACT RATING: 3A @120VAC; 1A @250VAC
5. FIXED TERM/MOVING CONTACT:
 - 10 MICRO INCH GOLD PLATE OVER
 - 400 MICRO INCH SILVER PLATING.
6. ELECTRIC LIFE: 30,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to +85°C
10. ▲ DENOTES CRITICAL PARAMETER.
11. 2002/95/EC (ROHS) COMPLIANT.

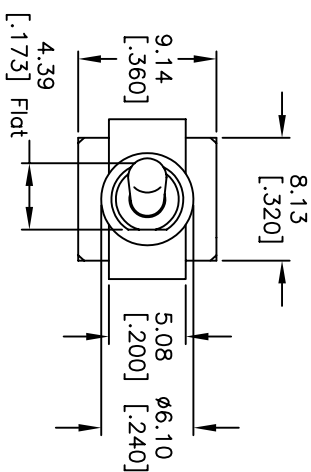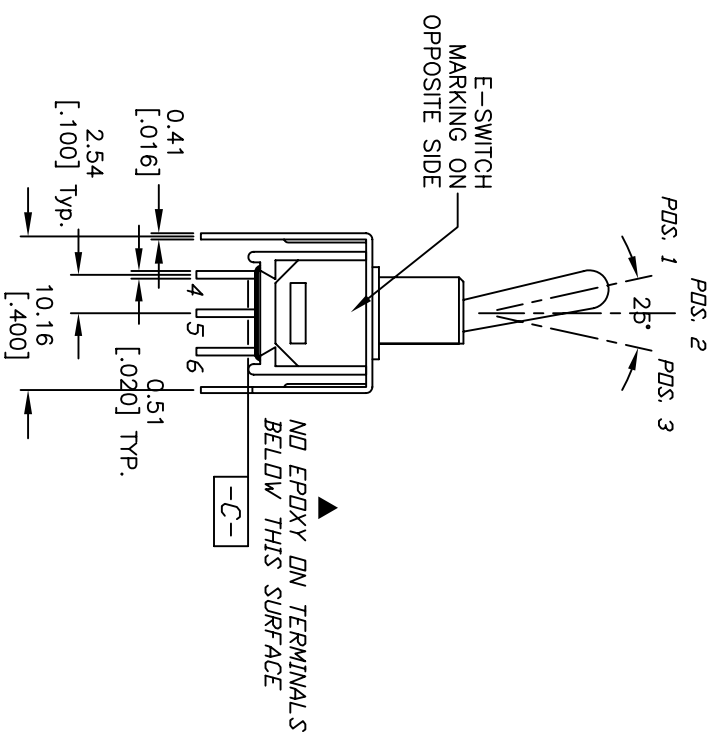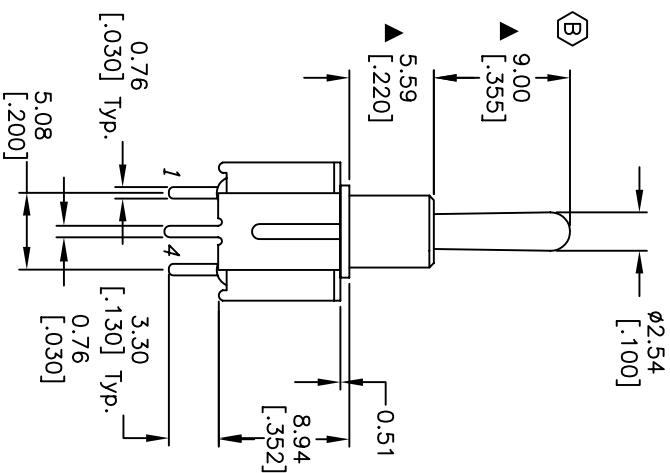

E	16564	8.64 TO 8.94	10/23/06	TN
D	14484	CONTACT RATING	11/10/04	AR
C	13764	CHANGE THE SILVER THICKNESS NOTE	2/13/04	AR
B	13700	CORRECT ACTUATOR	1/12/04	AR
A	13521	RELEASED FOR PRODUCTION	10/10/03	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
E-SWITCH®				
200MDP3T1B2VS2CE				
SCALE	DATE	DR	DWG	REV
2:1	10/10/03	AR	T224052	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED