



SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	OFF	ON
2-3, 5-6	OPEN	2-1, 5-4



- NOTE:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
 3. TERMINAL NUMBERS FOR REF ONLY
 - ▲ 4. PLATING MATERIAL: SILVER
 5. RATING: 2 AMPS @ 250VAC
5 AMPS @ 120VAC OR 28VDC
 6. CONTACT RESISTANCE: 10 MILLE-OHMS MAX. (INITIAL)
@2-4 VDC, 100 MILLE-AMP
 7. ELECTRIC LIFE: 40,000 MAKE-AND-BREAK CYCLES
AT FULL LOAD.
 8. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
 9. DIELECTRIC STRENGTH: 1,000 V RMS @SEA LEVEL.
 10. OPERATING TEMP.: -30°C to 85°C
 11. ▲ DENOTES CRITICAL PARAMETER.
 12. 2011/65/EU (ROHS) COMPLIANT

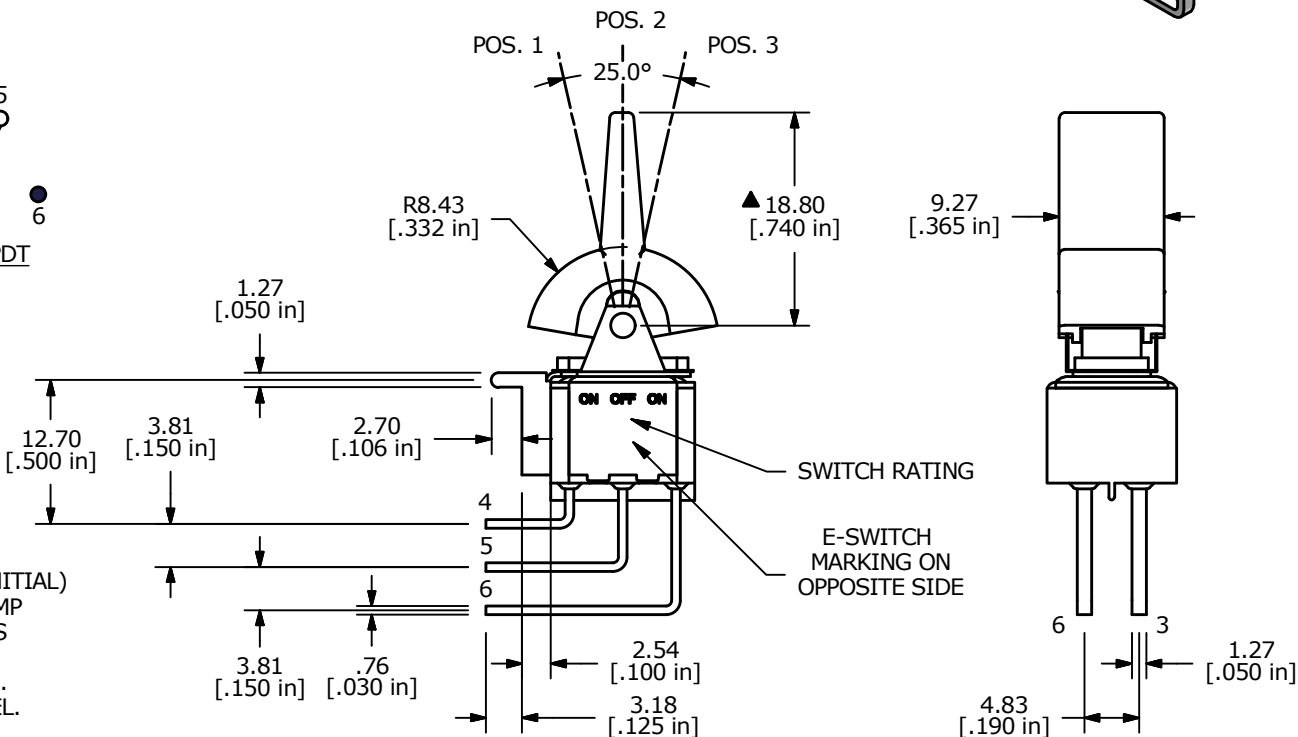

A	22641	NEW RELEASE	12/15/16	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE 300DP3J2BLKM7QE				
SCALE	DATE	DR	DWG	REV
2:1	12/15/2016	MJR	T324079	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED