
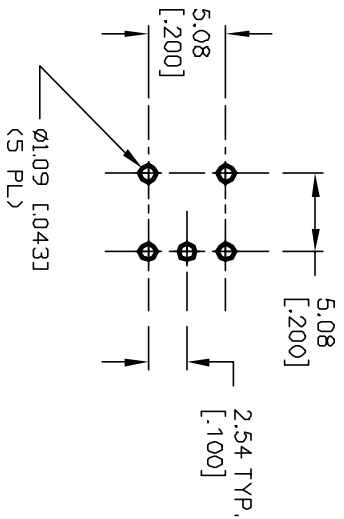



CIRCUIT: SPDT

CONTACT CONFIGURATION

SWITCH FUNCTION		
PDS: 1	PDS: 2	PDS: 3
DN	NONE	DN
2-3	OPEN	2-1

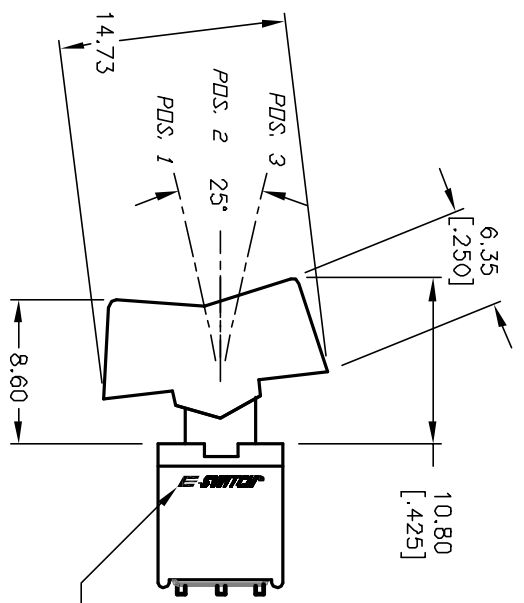

RECOMMENDED P.C.B. LAYOUT

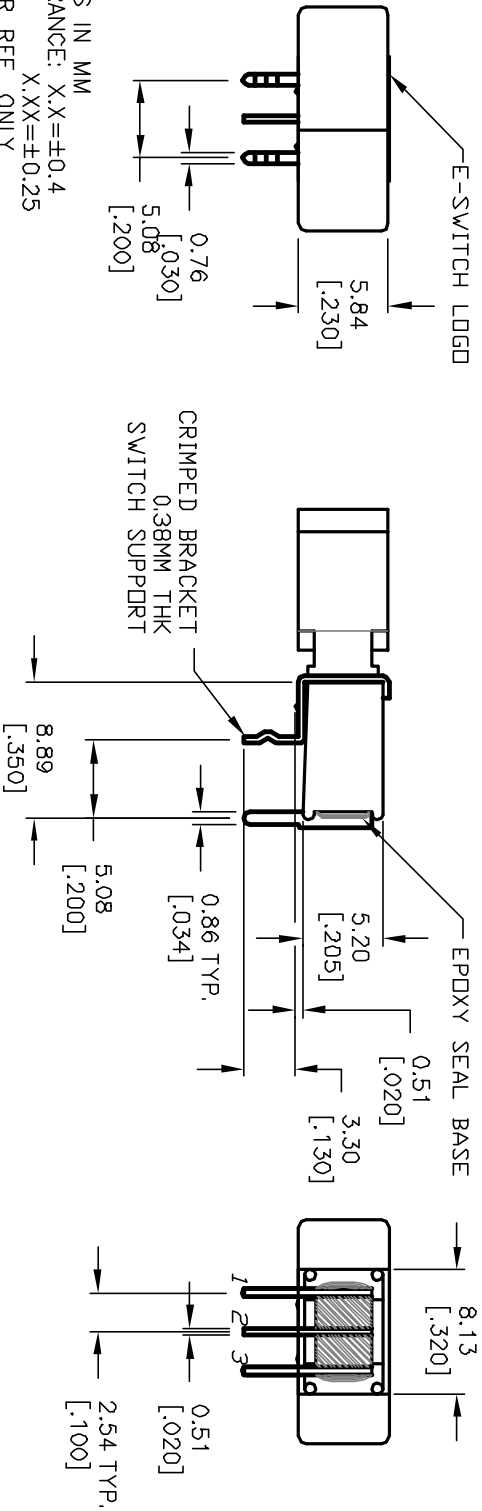

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4(VA) max @20VDC
5. FIXED TERMINAL/MOVING CONTACT MATERIAL:  
COPPER ALLOY w/Gold plating over  
Nickel plate.
6. ELECTRIC LIFE: 30,000 make-and-break cycles  
at full load.
7. INSULATION RESISTANCE: 1,000 M ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP, -30°C to +85°C
10. ▲ DESIGNATE MAJOR FEATURE

**E-SWITCH®**

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
A	12230	RELEASED	6/28/02	CJB	2:1	4/12/01	CJB	T403009	A
TITLE					4004 W MSP-1 R2 M6-1 RE (GOLD CONTACTS)				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									