


RECOMMENDED P.C.B. LAYOUT





SWITCH FUNCTION	<DN>
DN	<DN>
1-3	1-2

< > =MOMENTARY

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @20V AC or DC max.
5. FIXED TERM. & MOVING CONTACT: COPPER ALLOY w/GOLD plate over Nickel plate.
6. CONTACT RESISTANCE: 10mΩ±ohms initial @2-4VDC
7. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
8. INSULATION RESISTANCE: 1,000M ohm min.
9. DIELECTRIC STRENGTH: 1000V RMS @sed level
10. OPERATING TEMP.: -30°C to +85°C

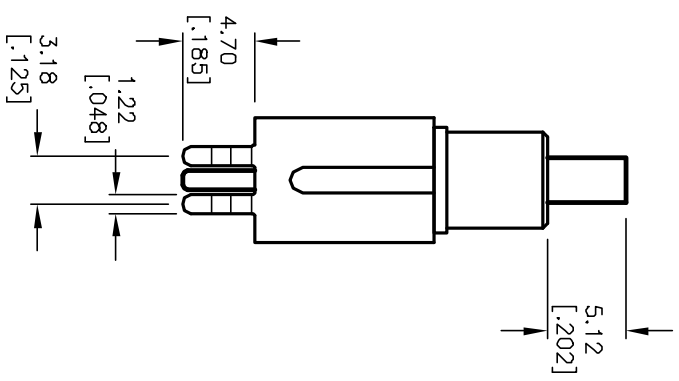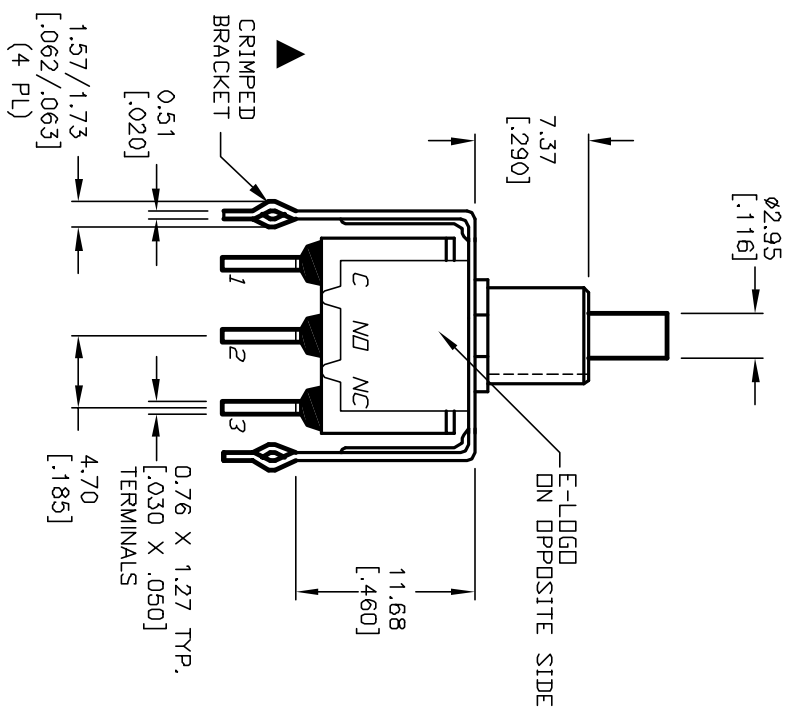

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12040	RELEASED FOR PRODUCTION	4/4/02	CJB

TITLE	SCALE	DATE	DR	DWG	REV
700 SP-7 B20 VS21 RE (GOLD CONTACTS) (CRIMPED VS2 BRACKET)	2:1	4/4/02	CJB	T711032	A



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED