

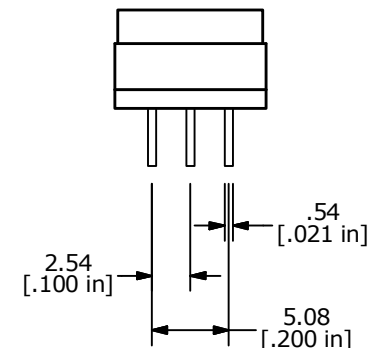
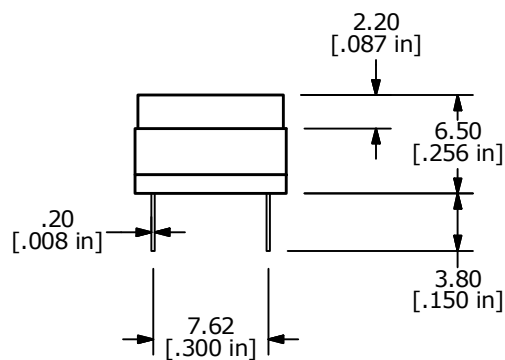

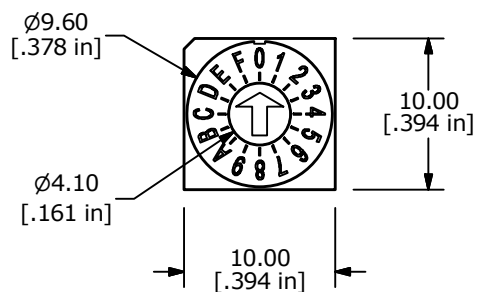


REAL CODE

	C	1	2	4	8	
0	●					0
1	●	●				1
2	●		●			2
3	●	●	●			3
4	●			●		4
5	●	●		●		5
6	●		●	●		6
7	●	●	●	●		7
8	●				●	8
9	●	●			●	9
10	●		●		●	A
11	●	●	●		●	B
12	●			●	●	C
13	●		●	●	●	D
14	●		●	●	●	E
15	●	●	●	●	●	F

16 POSITIONS

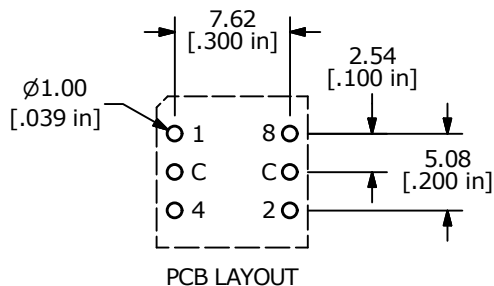

- NOTES:
- ALL DIMENSIONS IN MM [INCH]
  - GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
  - TERMINAL NUMBERS FOR REFERENCE ONLY
  - OPERATING FORCE: 700gf-cm MAX.
  - CONTACT RATING: 150mA, 42V DC (SWITCHING)  
200mA, 42V DC (NON-SWITCHING)
  - CONTACT RESISTANCE: 80mΩ MAX.
  - INSULATION RESISTANCE: 100MΩ MIN @ 250VDC
  - DIELECTRIC STRENGTH: 250VAC 1 MIN.
  - LIFE: 10,000 STEPS
  - OPERATING TEMPERATURE: -40°C to 85°C
  - PACKAGING: 50 PCS TUBE
  - IP RATING: NONE
  - ▲ DENOTES CRITICAL PARAMETER
  - 2011/65/EU (ROHS) COMPLIANT



A	23333	Release for Production	5/8/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE RDTAR16P1T				
SCALE 2:1	DATE 5/8/2018	DR MW	DWG U200046	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED