

CIRCUIT: SPST
CONTACT CONFIGURATION




90° INDEXING

SWITCH FUNCTION	
POS 1	POS 2
↑	→
OFF	1-2

LEGEND

⊙ = INDICATES KEY PULL POSSIBLE

● = DETENT POSITION

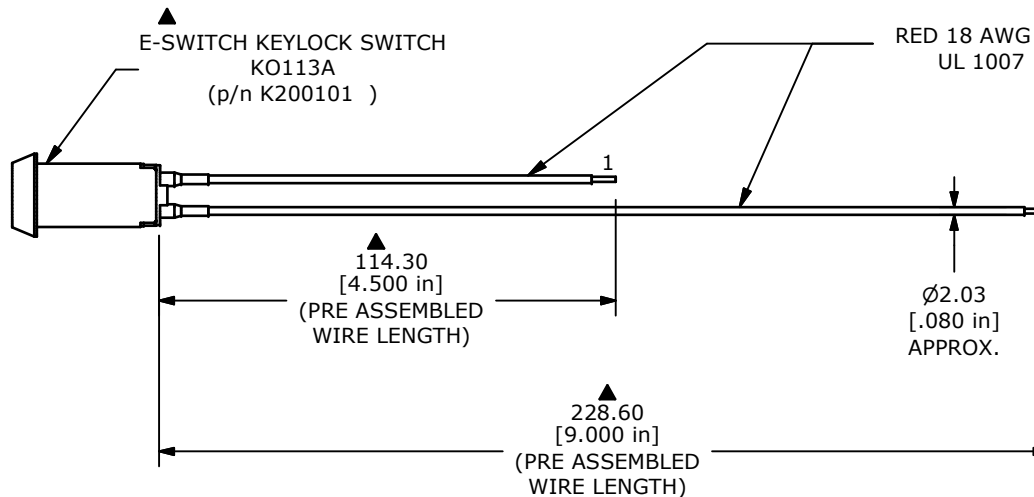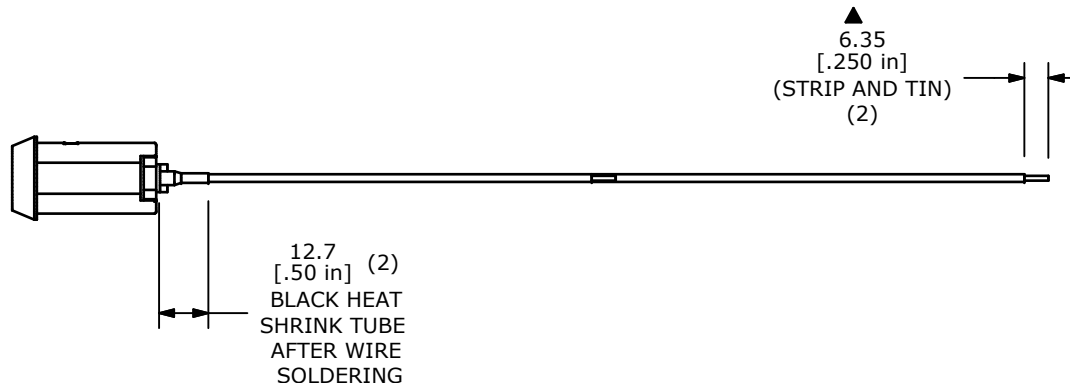

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. PLATING MATERIAL: SILVER
4. RATING: 4A @125 VAC, 2A @250 VAC
5. INSULATION RESISTANCE: 200 MEGA-OHM MIN.
6. DIELECTRIC STRENGTH: 1,500 V RMS @SEA LEVEL.
7. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 8. PACKAGE IN CLEAR BAG: 3 KEYS (1 INSERTED, 2 ON WIRE LOOP), 1 NUT (NOT INSTALLED ON BODY)
- ▲ 9. KEYCODE: 10003
10. 2002/95/EC (ROHS) COMPLIANT



TITLE KO113A W / WIRE ASSEMBLY - KEYCODE 10003

A	18310	RELEASE FOR PRODUCTION	11/7/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

SCALE	DATE	DR	DWG	REV
1 : 2	11/7/2008	BLR	XK0003P	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED