


CIRCUIT: SPDT  
CONTACT CONFIGURATION

DN	<DN>
2-1	2-3

( ) = Momentary

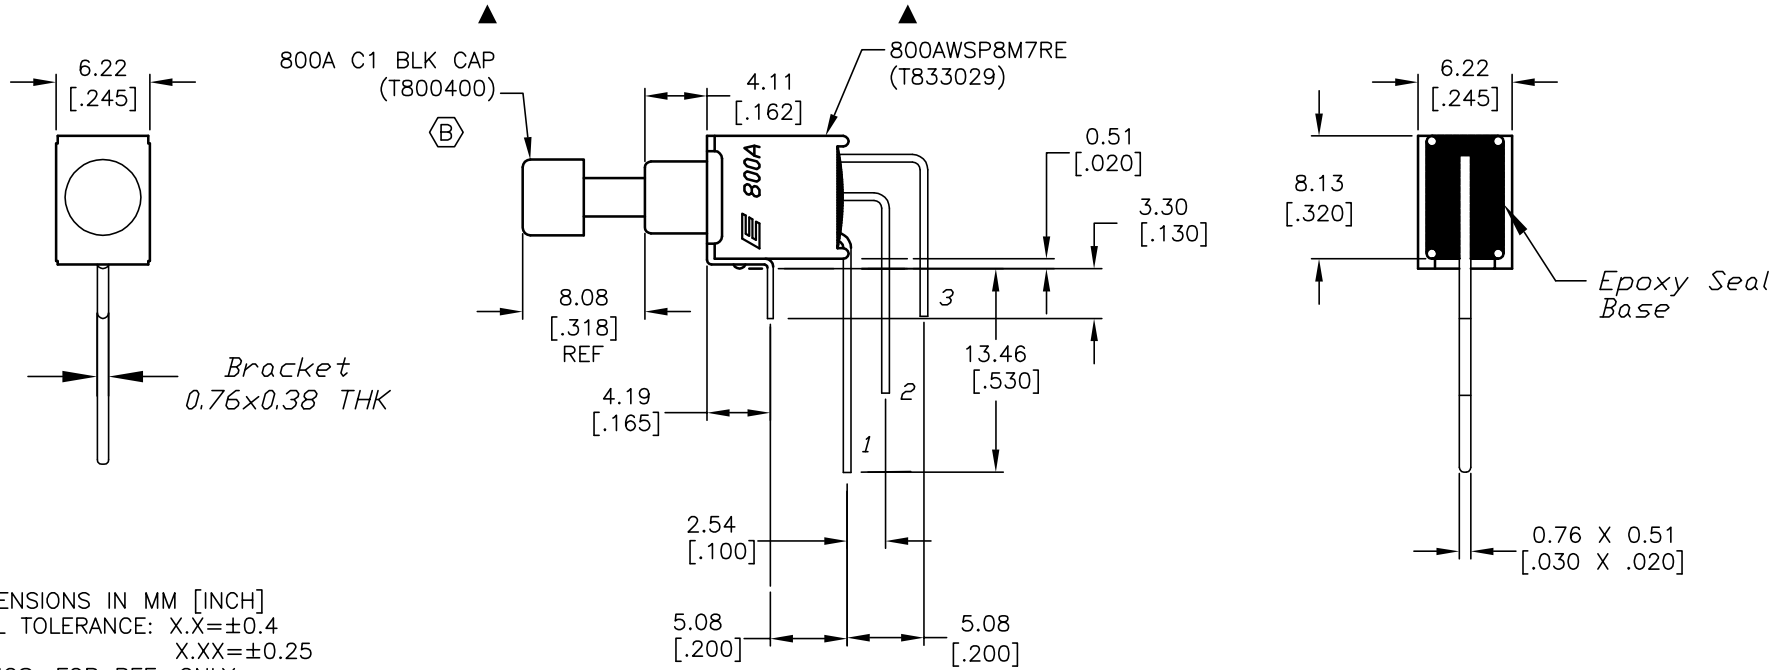

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 0.4VA @ 20V AC or DC max.
- ▲ 5. FIXED TERM. MOVING CONTACT: COPPER ALLOY with GOLD Plate over Nickel plate
6. ELECTRICAL LIFE: 50,000 make-and-break cycle at full load.
7. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
8. OPERATING TEMP.: -30°C to 85°C
9. ▲ DENOTES CRITICAL PARAMETER.

**E-SWITCH®**

B	12575	CHANGE CAP PART NUMBER	12/14/04	AR
A	14257	RELEASED FOR PRODUCTION	8/20/04	AR
REV.	ECN No.	DESCRIPTION	DATE	CHKD

TITLE				
800AWSP8M7REC1BLK				
SCALE	DATE	DR	DWG	REV
2:1	8/20/04	AR	XT0127P	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED