
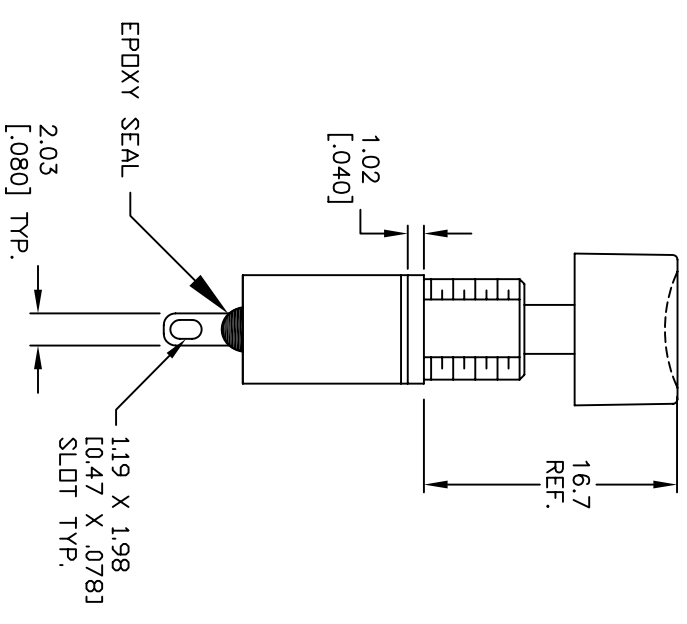
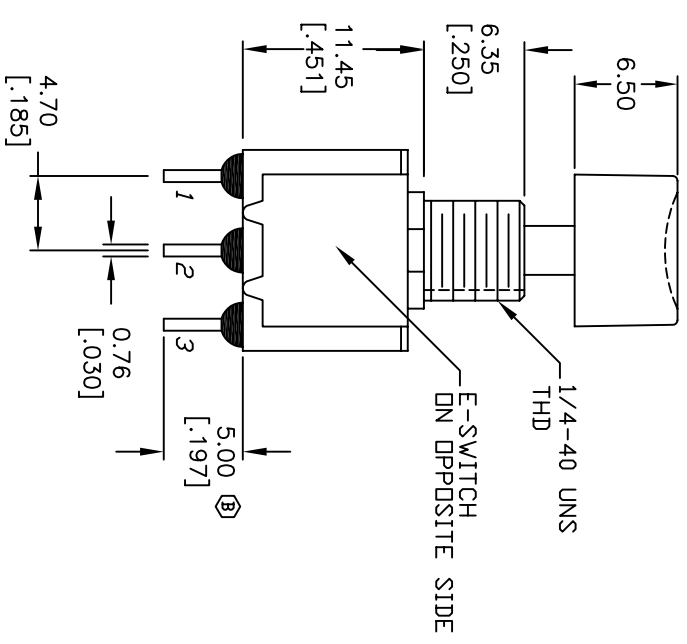


CIRCUIT: SPDT

SWITCH FUNCTION	
DN	<DN>
1-3	1-2

< > =MENTORARY

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X=±0.4 X.XX=±0.25
 3. TERM. NOS. FOR REF. ONLY
 4. RATING: 0.4VA @20VAC max.
 5. CONTACT RESISTANCE: 10mΩ-ohms initial @2-4VDC
 6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
 7. INSULATION RESISTANCE: 1,000M ohm min.
 8. DIELECTRIC STRENGTH: 1000V RMS @sea level
 9. OPERATING TEMP.: -30°C to 85°C
 10. ▲ DENOTES CRITICAL PARAMETER.

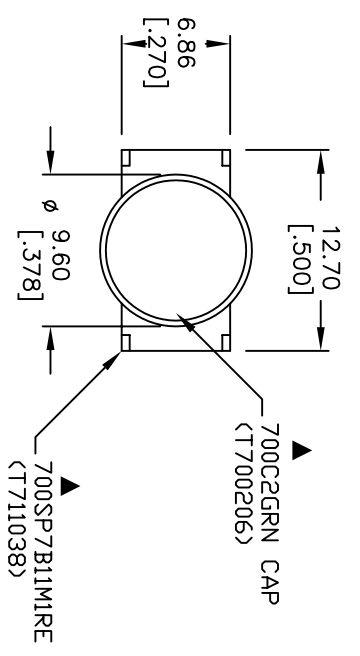

REV.	ECN NO.	DESCRIPTION	DATE	CHKD
B	18492	TERMINAL LENGTH DIM UPDATE	4/20/09	BLR
A	14324	RELEASED FOR PRODUCTION	9/16/04	CJB

TITLE		SCALE	DATE	DR	DWG	REV
700SP7B1M1REC2GRN		2:1	9/16/04	AR	XT0128P	B



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED