




SCHEMATIC  
DPDT ILLUMINATED  
ON - ON

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-RED (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1-GREEN (+)	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-BLUE (+)	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

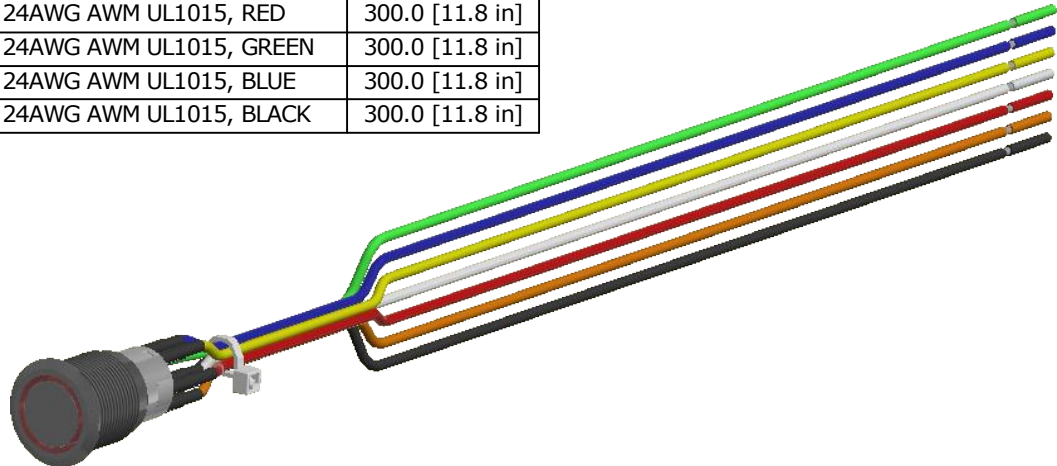

RECOMMENDED PANEL CUTOUT  
MAX. PANEL THICKNESS 11mm [.43 in]

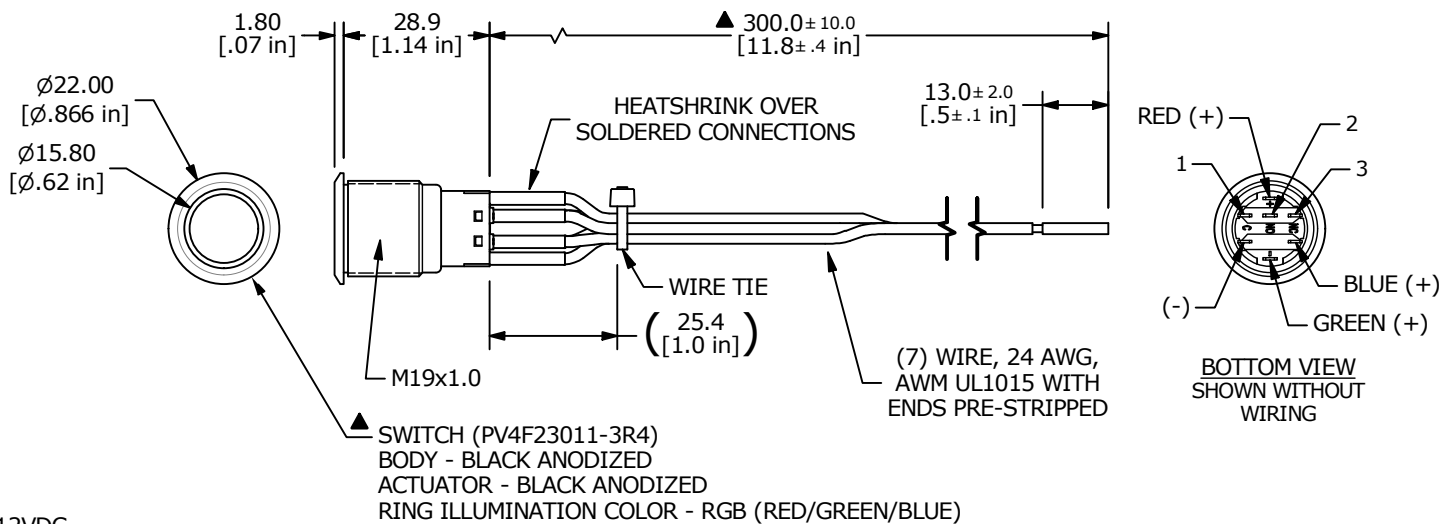

- NOTES:
1. DIMENSIONS IN MM [INCH]
  2. ALL MATERIAL SHALL BE ROHS COMPLIANT
  3. TERMINAL NUMBERS FOR REF. ONLY
  - ▲ 4. CONTACT MATERIAL: SILVER
  5. RATING: 2A 24VDC
  - ▲ 6. LAMP VOLTAGE: 12V
  7. INGRESS PROTECTION: IP67
  8. TRAVEL: 2.8mm
  9. OPERATING TEMP.: -25°C to 55°C
  10. INSULATION RESISTANCE: 1,000 MΩ MIN.
  11. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  12. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  13. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
  14. ▲ DENOTES CRITICAL PARAMETER.
  - ▲ 15. SUPPLIED HARDWARE: O-RING and HEXNUT
  16. USE P/N'S DESIGNATED or ENGINEERING APPROVED EQUIVALENTS

TITLE PV4FW3011-3R4				
SCALE	DATE	DR	DWG	REV
2:3	10/5/2020	MW	52-PV4FW30113R4	A