


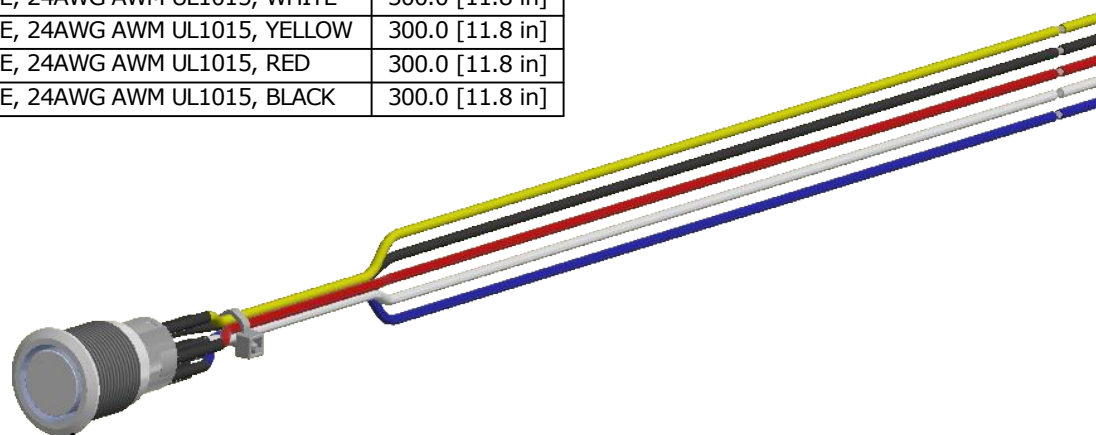


**SCHEMATIC**  
 ON - (ON) - SPDT ILLUMINATED  
 ( ) DENOTES MOMENTARY FUNCTION

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1- (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]



**RECOMMENDED PANEL CUTOUT**  
 MAX. PANEL THICKNESS 11mm [.43 in]

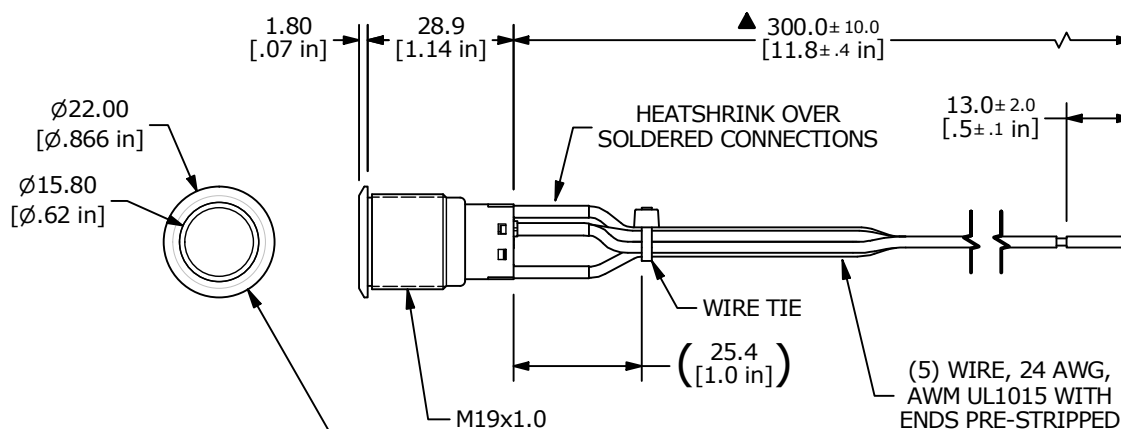

- NOTES:**
1. DIMENSIONS IN MM [INCH]
  2. TERMINAL NUMBERS FOR REF. ONLY
  - ▲ 3. CONTACT MATERIAL: SILVER
  4. RATING: 2A 24VDC
  - ▲ 5. LAMP VOLTAGE: 2.8V
  6. INGRESS PROTECTION: IP65
  7. TRAVEL: 2.8mm
  8. OPERATING TEMP.: -20°C to 55°C
  9. INSULATION RESISTANCE: 1,000 MΩ MIN.
  10. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  11. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  12. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
  13. ▲ DENOTES CRITICAL PARAMETER.
  14. ALL MATERIAL SHALL BE ROHS COMPLIANT
  - ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
  16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

SWITCH (PV4F2B0SS-341)  
 BODY - STAINLESS STEEL  
 ACTUATOR - STAINLESS STEEL  
 RING ILLUMINATION COLOR - BLUE



TITLE PV4FWB0SS-341

A	24688	RELEASE	1/15/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

SCALE	DATE	DR	DWG	REV
2:3	1/15/2021	MW	52-PV4FWB0SS341	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED