



SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-RED (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1-GREEN (+)	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-BLUE (+)	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]



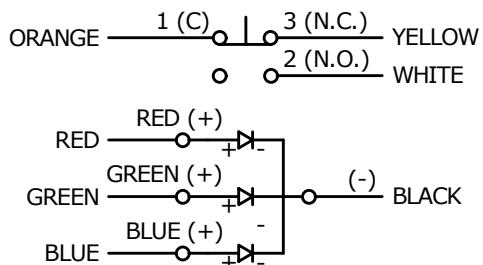


SCHEMATIC

ON - (ON) - DPDT ILLUMINATED
 () DENOTES MOMENTARY FUNCTION



RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 11.0 [.43 in]

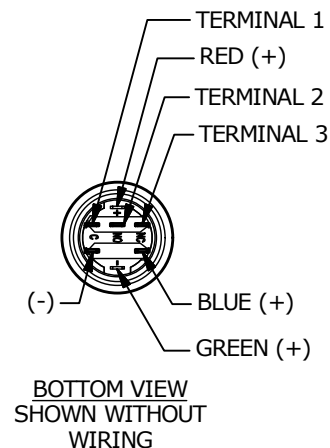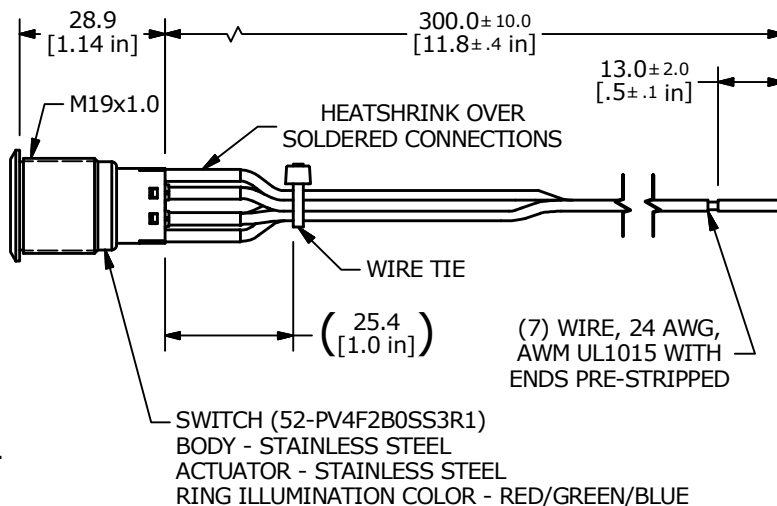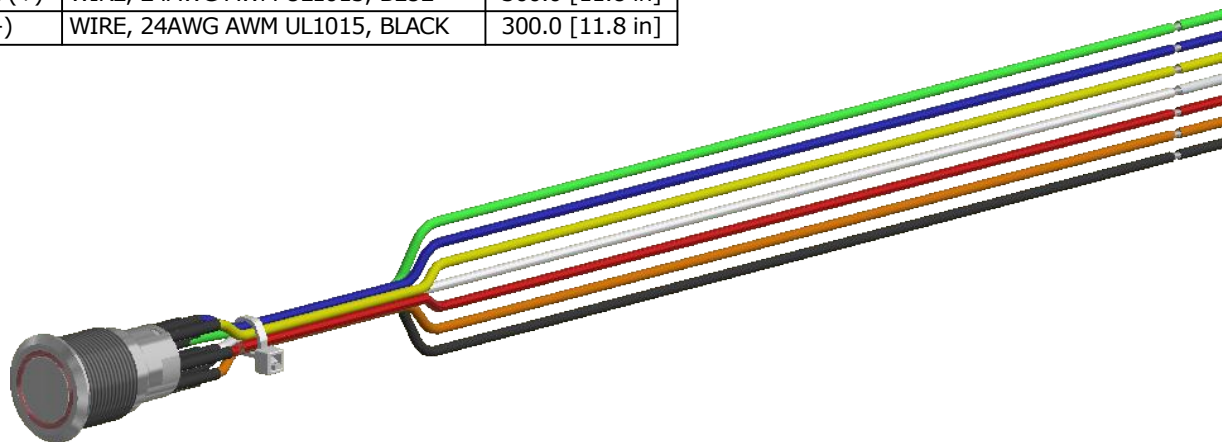

- NOTES:**
- DIMENSIONS IN MM [INCH]
 - ALL MATERIAL SHALL BE ROHS COMPLIANT
 - TERMINAL NUMBERS FOR REF. ONLY
 - CONTACT MATERIAL: SILVER
 - RATING: 2A 24VDC
 - ▲ 6. LAMP VOLTAGE: RED-1.8V, GREEN-2.8V, BLUE-2.8V
 - INGRESS PROTECTION: IP67
 - TRAVEL: 2.8mm
 - OPERATING TEMP.: -25°C to 55°C
 - INSULATION RESISTANCE: 1,000 MΩ MIN.
 - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 - DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
 - ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
 - ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
 - USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.



B	23993	UPDATED NOTES	8/13/19	MJR
A	23944	NEW RELEASE	6/20/19	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV4FWB0SS-3R1				
SCALE 2:3	DATE 6/20/2019	DR MJR	DWG 52-PV4FWB0SS3R1	REV B