



SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-RED (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1-GREEN (+)	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-BLUE (+)	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

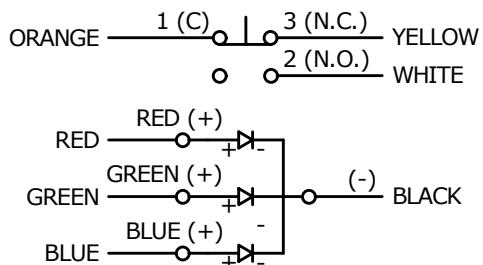

SCHEMATIC




ON - (ON) - DPDT ILLUMINATED
 () DENOTES MOMENTARY FUNCTION



RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 11.0 [.43 in]

NOTES:

1. DIMENSIONS IN MM [INCH]
2. ALL MATERIAL SHALL BE ROHS COMPLIANT
3. TERMINAL NUMBERS FOR REF. ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 24VDC
- ▲ 6. LAMP VOLTAGE: 24V
7. INGRESS PROTECTION: IP67
8. TRAVEL: 2.8mm
9. OPERATING TEMP.: -25°C to 55°C
10. INSULATION RESISTANCE: 1,000 MΩ MIN.
11. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
12. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
13. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
14. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
16. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

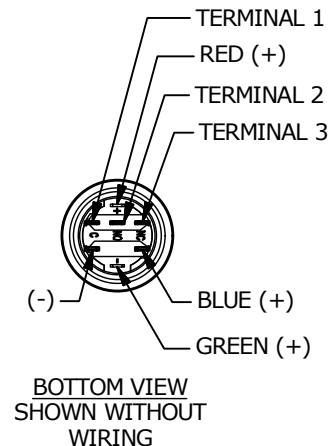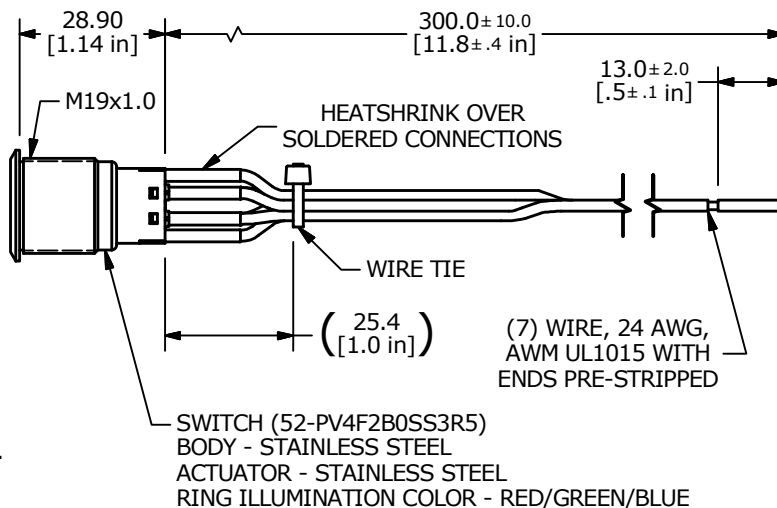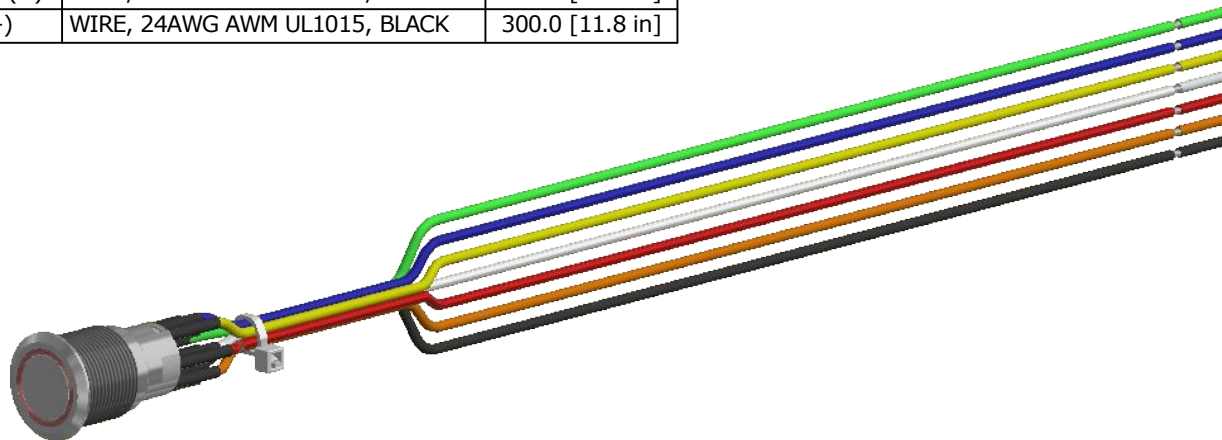

B	23994	UPDATED NOTES	8/13/19	MJR
A	23898	NEW RELEASE	5/17/19	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV4FWB0SS-3R5				
SCALE 2:3	DATE 5/17/2019	DR MJR	DWG 52-PV4FWB0SS3R5	REV B