




SCHEMATIC  
SPDT ON - ON  
RGB ILLUMINATED

SWITCH	WIRE	LENGTH
SW1-1	WIRE, 24AWG AWM UL1015, ORANGE	300.0 [11.8 in]
SW1-2	WIRE, 24AWG AWM UL1015, WHITE	300.0 [11.8 in]
SW1-3	WIRE, 24AWG AWM UL1015, YELLOW	300.0 [11.8 in]
SW1-RED (+)	WIRE, 24AWG AWM UL1015, RED	300.0 [11.8 in]
SW1-GREEN (+)	WIRE, 24AWG AWM UL1015, GREEN	300.0 [11.8 in]
SW1-BLUE (+)	WIRE, 24AWG AWM UL1015, BLUE	300.0 [11.8 in]
SW1- (-)	WIRE, 24AWG AWM UL1015, BLACK	300.0 [11.8 in]

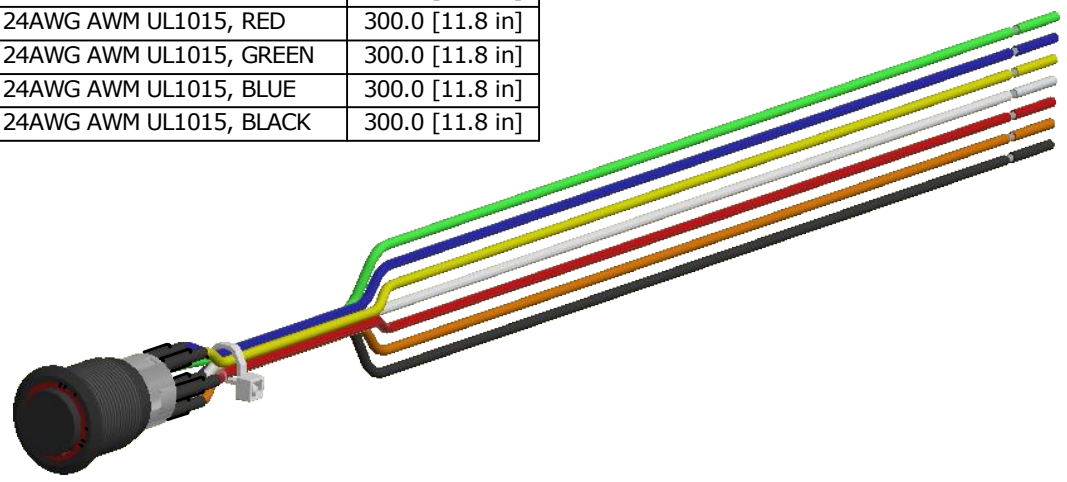

RECOMMENDED PANEL CUTOUT  
MAX. PANEL THICKNESS 11mm [.43 in]

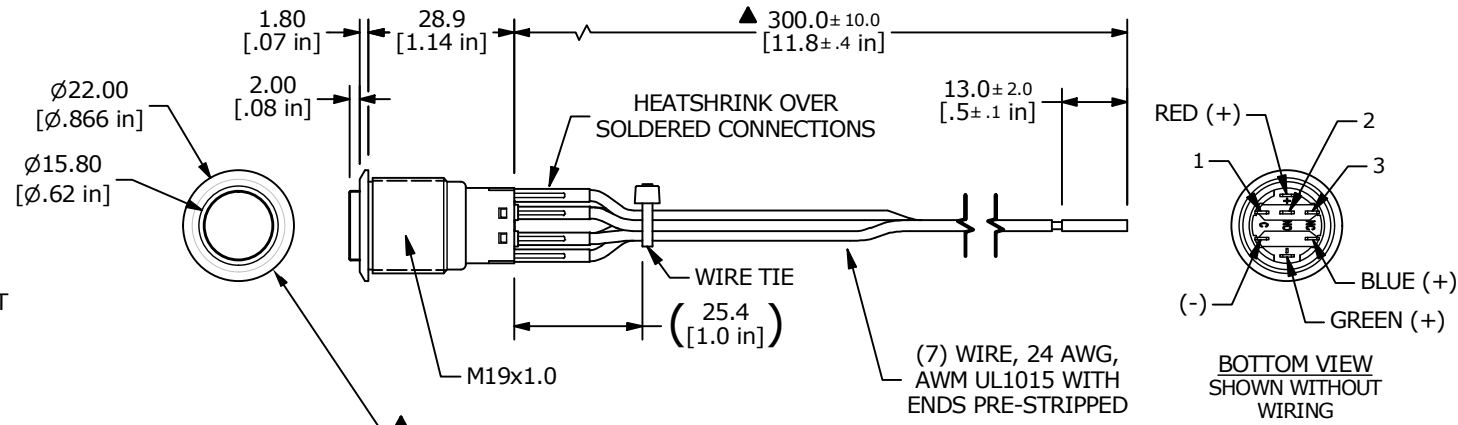

- NOTES:
1. DIMENSIONS IN MM [INCH]
  2. ALL MATERIAL SHALL BE ROHS COMPLIANT
  3. TERMINAL NUMBERS FOR REF. ONLY
  - ▲ 4. CONTACT MATERIAL: SILVER
  5. RATING: 2A 24VDC
  - ▲ 6. LAMP VOLTAGE: 6V
  7. INGRESS PROTECTION: IP67
  8. TRAVEL: 2.8mm
  9. OPERATING TEMP.: -25°C to 55°C
  10. INSULATION RESISTANCE: 1,000 MΩ MIN.
  11. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
  12. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
  13. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD
  14. ▲ DENOTES CRITICAL PARAMETER.
  - ▲ 15. SUPPLIED HARDWARE: O-RING AND HEXNUT
  16. USE P/N'S DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS

SWITCH (PV4H23011-3R3)  
BODY - BLACK ANODIZED  
HIGH ACTUATOR - BLACK ANODIZED  
RING ILLUMINATION COLOR - RGB (RED/GREEN/BLUE)



A	24762	RELEASE	2/23/21	MW
REV	PCR NO	DESCRIPTION	DATE	BY

TITLE PV4HW3011-3R3				
SCALE	DATE	DR	DWG	REV
2:3	2/23/2021	MW	52-PV4HW30113R3	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED