



CIRCUIT LAYOUT

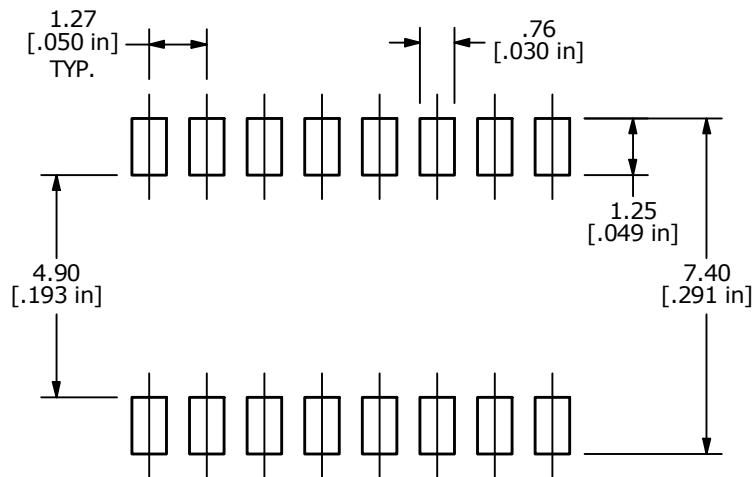

PC LAYOUT


▲ ALL 8 POLES SET TO "ON" POSITION

▲ TAPE FOR AUTOMATED PICKUP

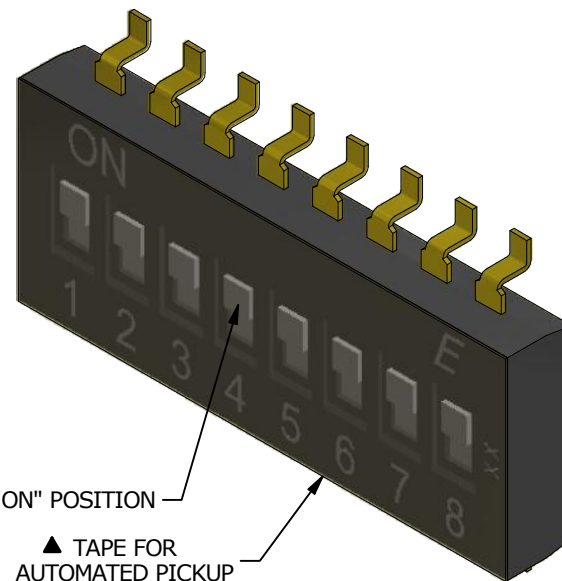

NOTE:

1. ALL DIMENSIONS IN MM [INCH].
2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: 500 ± 100 gf
5. TRAVEL: 0.6 ± 0.25 mm
6. CONTACT RATING: 25mA, 24VDC
7. CONTACT RESISTANCE: 100mΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
9. DIELECTRIC STRENGTH: 300VAC 1 MIN.
10. LIFE: 1,000 CYCLES.
11. OPERATING TEMPERATURE: -40°C to 85°C
- ▲ 12. PACKAGING: 4,000 PCS PER REEL
- ▲ 13. ALL 8 POLES SET TO "ON" POSITION.
14. ▲ DENOTES CRITICAL PARAMETER.

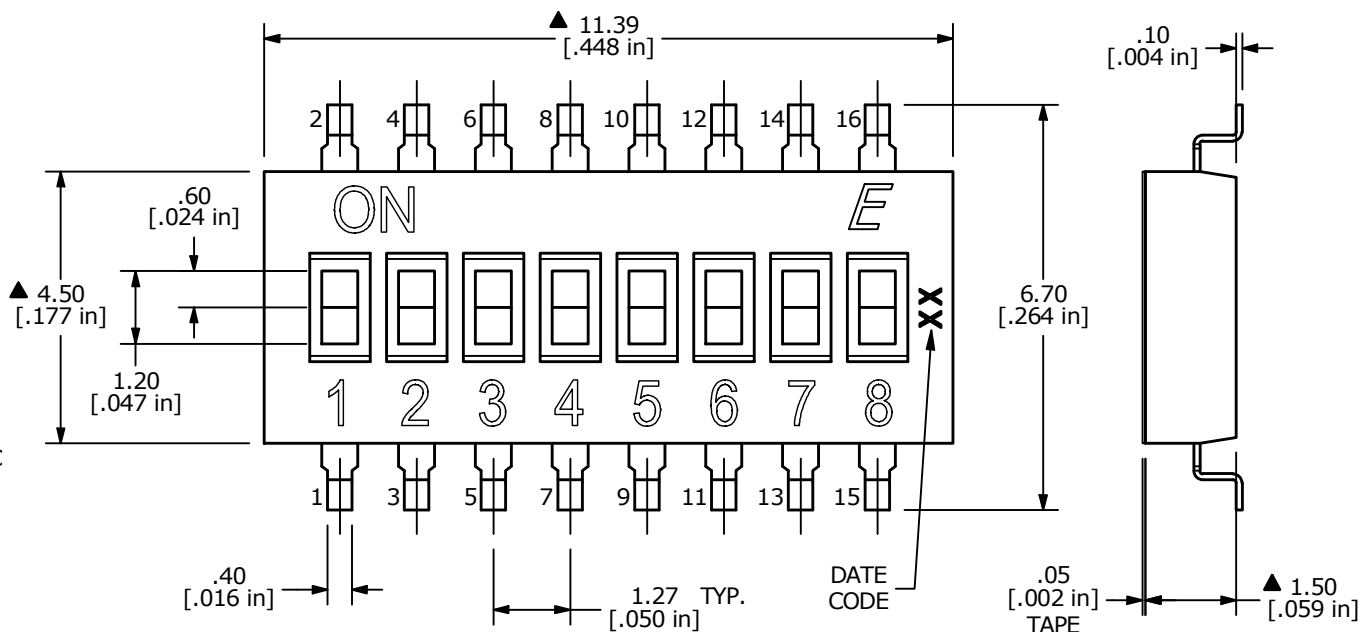

D	24750	update print	2/17/21	MW
C	15958	CHANGE TO ON POSITON	4/12/06	CT
B	15913	REMOVE DIP MARKING, ADD E	3/29/06	PH
A	15871	RELEASED FOR PRODUCTION	3/16/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY



TITLE KAN1108RR (ON Position)

SCALE	DATE	DR	DWG	REV
8:1	3/16/2006	PH	N111198	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED