

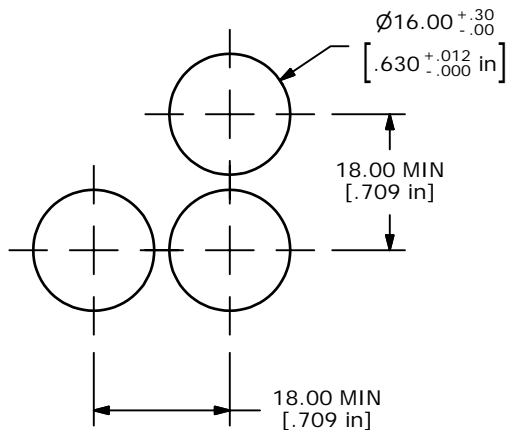
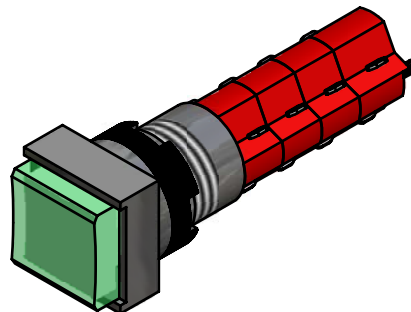



ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040043	D16OAS14
2	1	F050302	50-003-02 TRANSPARENT GREEN CONCAVE

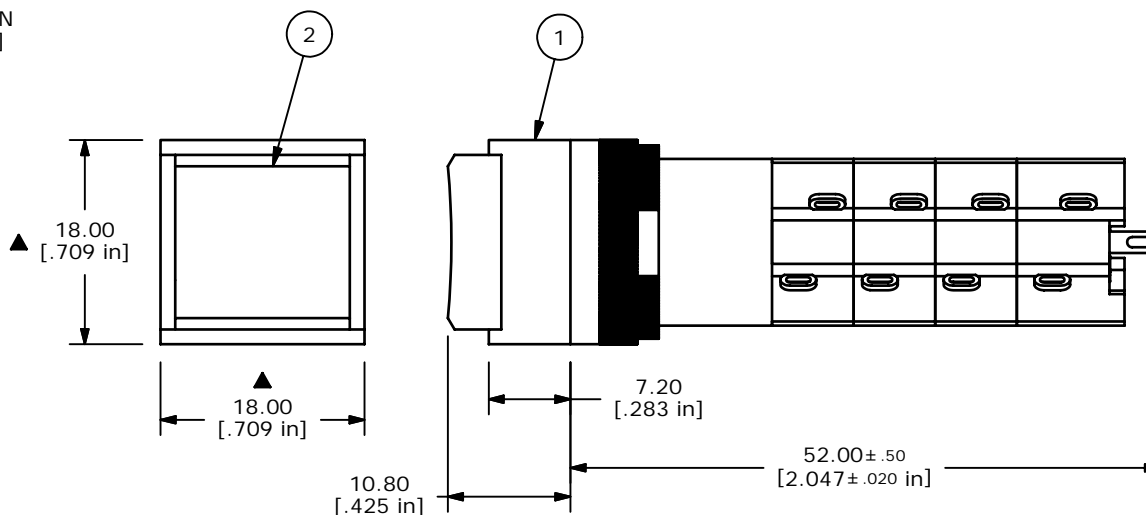

PANEL MOUNTING



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. RATING: 5A @ 250 VAC
6A @ 240 VDC
5. ELECTRICAL LIFE: 25,000 OPERATIONS
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 70°C
- ▲ 8. LAMP VOLTAGE: NONE
9. ▲ DENOTES CRITICAL PARAMETER.

E-SWITCH®

TITLE D16OAS140GRN

A	15627	RELEASED FOR PRODUCTION	1/5/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

SCALE	DATE	DR	DWG	REV
1.5:1	1/5/2006	PH	XF0661P	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED